


FULL MOONS

INSTALLATION & MAINTENANCE



CIRCLE SCREENS FOR FRONT PROJECTION, DIFFUSING LIGHT, OR PRINTING!

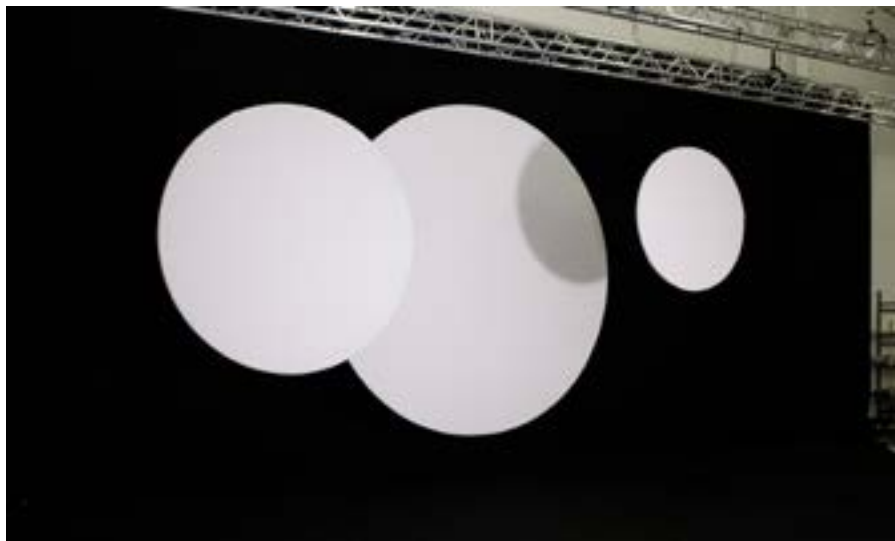

MOSS
WE ARE PLACE MAKERS™

Install questions?
Contact us. We're here to help
you succeed!



MOSS

WE ARE PLACE MAKERS™

888.370.0202

Proper Handling

To avoid smudges, always install the fabric wearing the gloves provided. Even clean hands can leave residue on the fabric. Consider using drop cloths or plastic sheeting to maintain a clean work environment as needed.

Storage

Qualified orders include a cloth drawstring bag, which is ideal for long-term storage. When storing your fabric in a sealed container, like the plastic it arrived in, the fabric must be completely dry to avoid mold or mildew.

If your product includes any metal parts such as gate rings, rigging supplies, or frames, be sure to remove them prior to storage.

Wrinkles can result from fabric storage. Almost all wrinkles from storage will stretch out once the fabric is installed correctly. If deep wrinkles persist, place in a dryer on low heat for a few minutes. **DO NOT OVER DRY.** Extended heat will damage the spandex in the material.

Cleaning

Light: Fingerprints from installation without gloves is the main culprit of a dirty Full Moon. To remove light stains, use soapy hot water and dab the area clean. We've seen a variety of stains lifted from our products with minimal effort.

Deep: Machine wash fabric on delicate with detergent and Oxiclean®. Do not use any bleach-based products, as it will damage the spandex in the material. Machine dry on low heat regularly opening the dryer to check for completion. Take precautions to ensure you **DO NOT OVER DRY** as this will damage the spandex in the material. This product will dry very fast. All of our products will retain IFR (Inherently Flame Retardant) certification event after repeated washes.

Dusting: We understand that many of our products may

be left up over long periods of time and collect dust. To remove dust on fabric, use your hand or a clean object to bat the surface, starting in the center and moving towards the edge, until the dust falls away.

Warranty

For a complete review of our warranty, please visit our website: <https://www.mossinc.com/terms-and-conditions>

Included Accessories



NITRILE GLOVES



STORAGE BAG



INVISIBLE RIGGING LINE

Recommended Tools



MEASURING TAPE



SHARP SCISSORS

Installation

Frame Assembly Instructions

1. Establish Work Environment

Assemble your frame pieces on a clean, flat surface.

2. Join Matching Segments

Insert the swaged end of a segment into the end of the segment with the corresponding number. Gently insert until the click button releases through the pre-drilled hole,



3. Repeat Step 2 Until Frame Is Complete

While some pressure may be required when inserting joints, we recommend keeping your frame flat on your installation surface, being careful not to torque or bend the



Fabric Application Instructions

1. Ensure Cleanliness of Environment

Prior to handling the fabric, we recommend wearing the provided nitrile gloves to avoid any finger smudges. Additionally, prepare a clean work environment for the fabric by laying out drop cloths or plastic sheeting if necessary.

2. Ensure Correct Orientation of Frame

One side of your assembled frame will have three pre-installed $\frac{1}{4}$ "-20 rivet nut inserts that will act as your aerial rigging points. The side with these inserts is the back of your Full Moon.



These three inserts are evenly spaced around the back circumference of your frame, one every 120 degrees (10 o'clock, 2 o'clock, 6 o'clock). This side of the frame featuring the inserts should be facing up when applying the skin.

3. Identify The Back of Your Frame and Skin

The back of your Full Moon fabric skin can be identified by looking for the small rigging point opening on the side of your zipper, near one of the zipper ends.



This opening is on the back side of the zipper, closest to the back side of your moon. With the inserts and back of your frame facing up, unzip your fabric skin, and pull it over your assembled moon frame. Make sure the back side of your fabric skin is on the back side of your frame.

4. Rotate Your Fabric

Prior to zipping your fabric skin shut, rotate it around your frame so the start of the zippered section sits over one of your frame's rivet nut inserts, and ends at another.



5. Attach Rigging

Screw in your 1/4"-20 "tiny" Eye Bolts into the rivet nuts on the frame to help hold your fabric skin in place.

One will go through the aforementioned small rigging point opening near the start of your zipper. The other will go at the end of your zipper opening.



6. Zip Fabric Skin Shut

You may now zip the fabric skin shut. If your frame is flat on the ground, with the rigging points facing up, you should be zipping clockwise. If you are zipping counterclockwise, your skin may be on backwards.

7. Identify Third Opening

Your fabric skin will have a third small finished opening, opposite the center of the zippered section, that will align with the third and final rivet nut



insert. This third rigging point can be used for horizontal rigging of your Full Moon, or for additional stability in a vertical rigging orientation.

8. Rig Your Full Moon

Using scissors, cut the provided invisible rigging line into equal lengths of choice. Pass a few inches of the line through your tiny eyes at the ends of your zippered section, and tie a strong knot. The other ends of the lines can then be tied off to rig your moon vertically. For horizontal rigging, repeat the above step but utilize all three rigging points.