

TRUSS COVER ROLLS

INSTALLATION & MAINTENANCE



THE BEST-KEPT SECRET TO A SUCCESSFUL EVENT ON THE FLY. ROLL OUT THE FABRIC AND CUT TO THE LENGTH YOU NEED!



MOSS
WE ARE PLACE MAKERS™

Install questions?
Contact us. We're here to help
you succeed!



MOSS

WE ARE PLACE MAKERS™

888.370.0202

Proper Handling

To avoid smudges, always install the fabric wearing the gloves provided. Even clean hands can leave residue on the fabric. Consider using drop cloths or plastic sheeting to maintain a clean work environment as needed.

Storage

Fabric: Qualified orders include a cloth drawstring bag, which is ideal for long-term storage. When storing your fabric in a sealed container, like the plastic it arrived in, the fabric must be completely dry to avoid mold or mildew.

If your product includes any metal parts such as gate rings, rigging supplies, or frames, be sure to remove them prior to storage.

Wrinkles can result from fabric storage. Almost all wrinkles from storage will stretch out once the fabric is installed correctly. If deep wrinkles persist, place in a dryer on low heat for a few minutes. **DO NOT OVER DRY.** Extended heat will damage the spandex in the material.

Cleaning

Light: Fingerprints from installation without gloves is the main culprit of a dirty truss cover. To remove light stains, use soapy hot water and dab the area clean. We've seen a variety of stains lifted from our products with minimal effort.

Deep: Machine wash fabric on delicate with detergent and Oxiclean®. Do not use any bleach-based products on IFR Stretch Fabric, as it will damage the spandex in the material. Bleach is ok on white Indoor Outdoor Stretch Fabric. Machine dry on low heat regularly opening the dryer to check for completion. Take precautions to ensure you **DO NOT OVER DRY** as this will damage the material. This product will dry very fast. All of our products will retain IFR (Inherently Flame Retardant) certification even after repeated washes.

Dusting: We understand that many of our products may be left up over long periods of time and collect dust. To remove dust on fabric, use your hand or a clean object to bat the surface, starting in the center and moving towards the edge, until the dust falls away.

Warranty

For a complete review of our warranty, please visit our website: <https://www.mossinc.com/terms-and-conditions>

Included Accessories



NITRILE GLOVES



STORAGE BAG



TAPE MEASURE



SHARP SCISSORS

Recommended Tools


Hook & Loop Truss Cover

Page 5



Pull Over Truss Cover Roll Instructions

[Jump to Page 6](#)

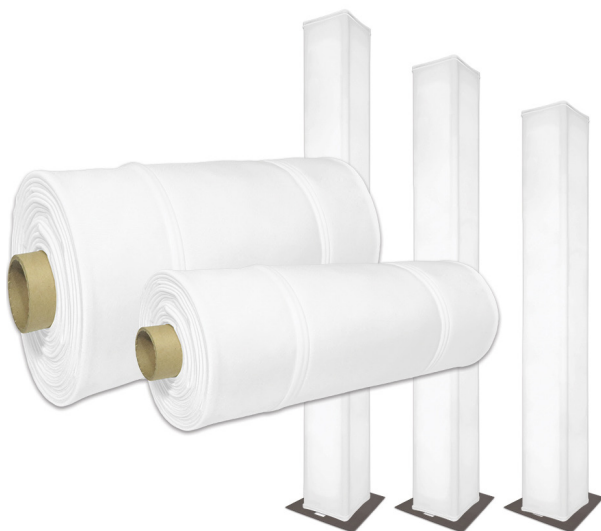

Hook & Loop Truss Cover Roll Installation

Pro Tips

- Use one of the edges of your truss as a backer surface when pressing the hook and loop together.
- For fastest installation, work with a partner to close hook and loop.
- If you are covering rental truss or older truss, be cautious of any dirty spots or metal burrs that could potentially stain or snag the fabric. Consider prepping truss by cleaning it and filing or taping over any burrs as needed.

1. Cut Truss Cover to Length

For IFR & Outdoor Box Truss Cover Rolls

Unroll your Truss Cover Roll on a clean surface and use sharp scissors to cut the exact measurement you need for the segment of truss you're covering. Be sure to measure along the Hook & Loop closure. There is no need to worry about fraying due to the special lock-stitch seam technology used to manufacture your Truss Cover Roll.

2. Flip Fabric Skin and Wrap Truss

In order to protect the fabric from damage, Truss Cover Rolls are sewn, rolled, and shipped inside out. Once your Truss Cover segment is cut to the length you need, flip right side out, pull apart the hook & loop connection, and wrap the fabric around your truss.

3. Join Hook and Loop Closure

Starting from one end, and working your way towards the other, attach the hook and loop pieces together. Pull the pieces tight before applying firm pressure to connect pieces evenly and avoid ribbing. Consider rotating installed truss cover to line the hook & loop seam up with one edge of truss for a clean and finished look.

Pull Over Truss Cover Roll Installation

Pro Tips

-If you are covering rental truss or older truss, be cautious of any dirty spots or metal burrs that could potentially stain or snag the fabric. Consider prepping truss by cleaning it and filing or taping over any burrs as needed.

-If you are covering closed systems like a goal post, be sure to install your Pull Over Truss Covers prior to assembling your closed truss system.

1. Cut Truss Cover to Length

For IFR Truss Cover Rolls

Unroll on a clean surface and use sharp scissors to cut the exact measurement you need for the segment of truss you're covering. There is no need to worry about fraying due to the special lock-stitch seam technology used to manufacture your Truss Cover Roll.

For Outdoor Box Truss Cover Rolls

12" & 290mm Truss- Unroll on a clean surface. Multiply the length of truss you need by 1.07 to get your cut length. For example, if you're covering a 10' segment, you would cut a length of 128.4" ($120" \times 1.07 = 128.4"$). Cut with sharp scissors.

20.5" Truss- Multiply the length of truss you need by 1.08 to get your cut length. For example, if you're covering a 10' segment, you would cut a length of 129.6" ($120" \times 1.08 = 129.6"$). Cut with sharp scissors.

2. Flip Fabric Skin and Pull On Cover

In order to protect the fabric from damage, Truss Cover Rolls are sewn, rolled, and shipped inside out. Once your Truss Cover segment is cut to the length you need, flip right side out and pull over the truss like a sock. Consider rotating installed truss cover to line the seam up with one edge of truss for a clean and finished look.