


FULL MOONS

FABRIC SKINS AND BUTTON-STOP FRAMES

INSTALLATION & MAINTENANCE GUIDE

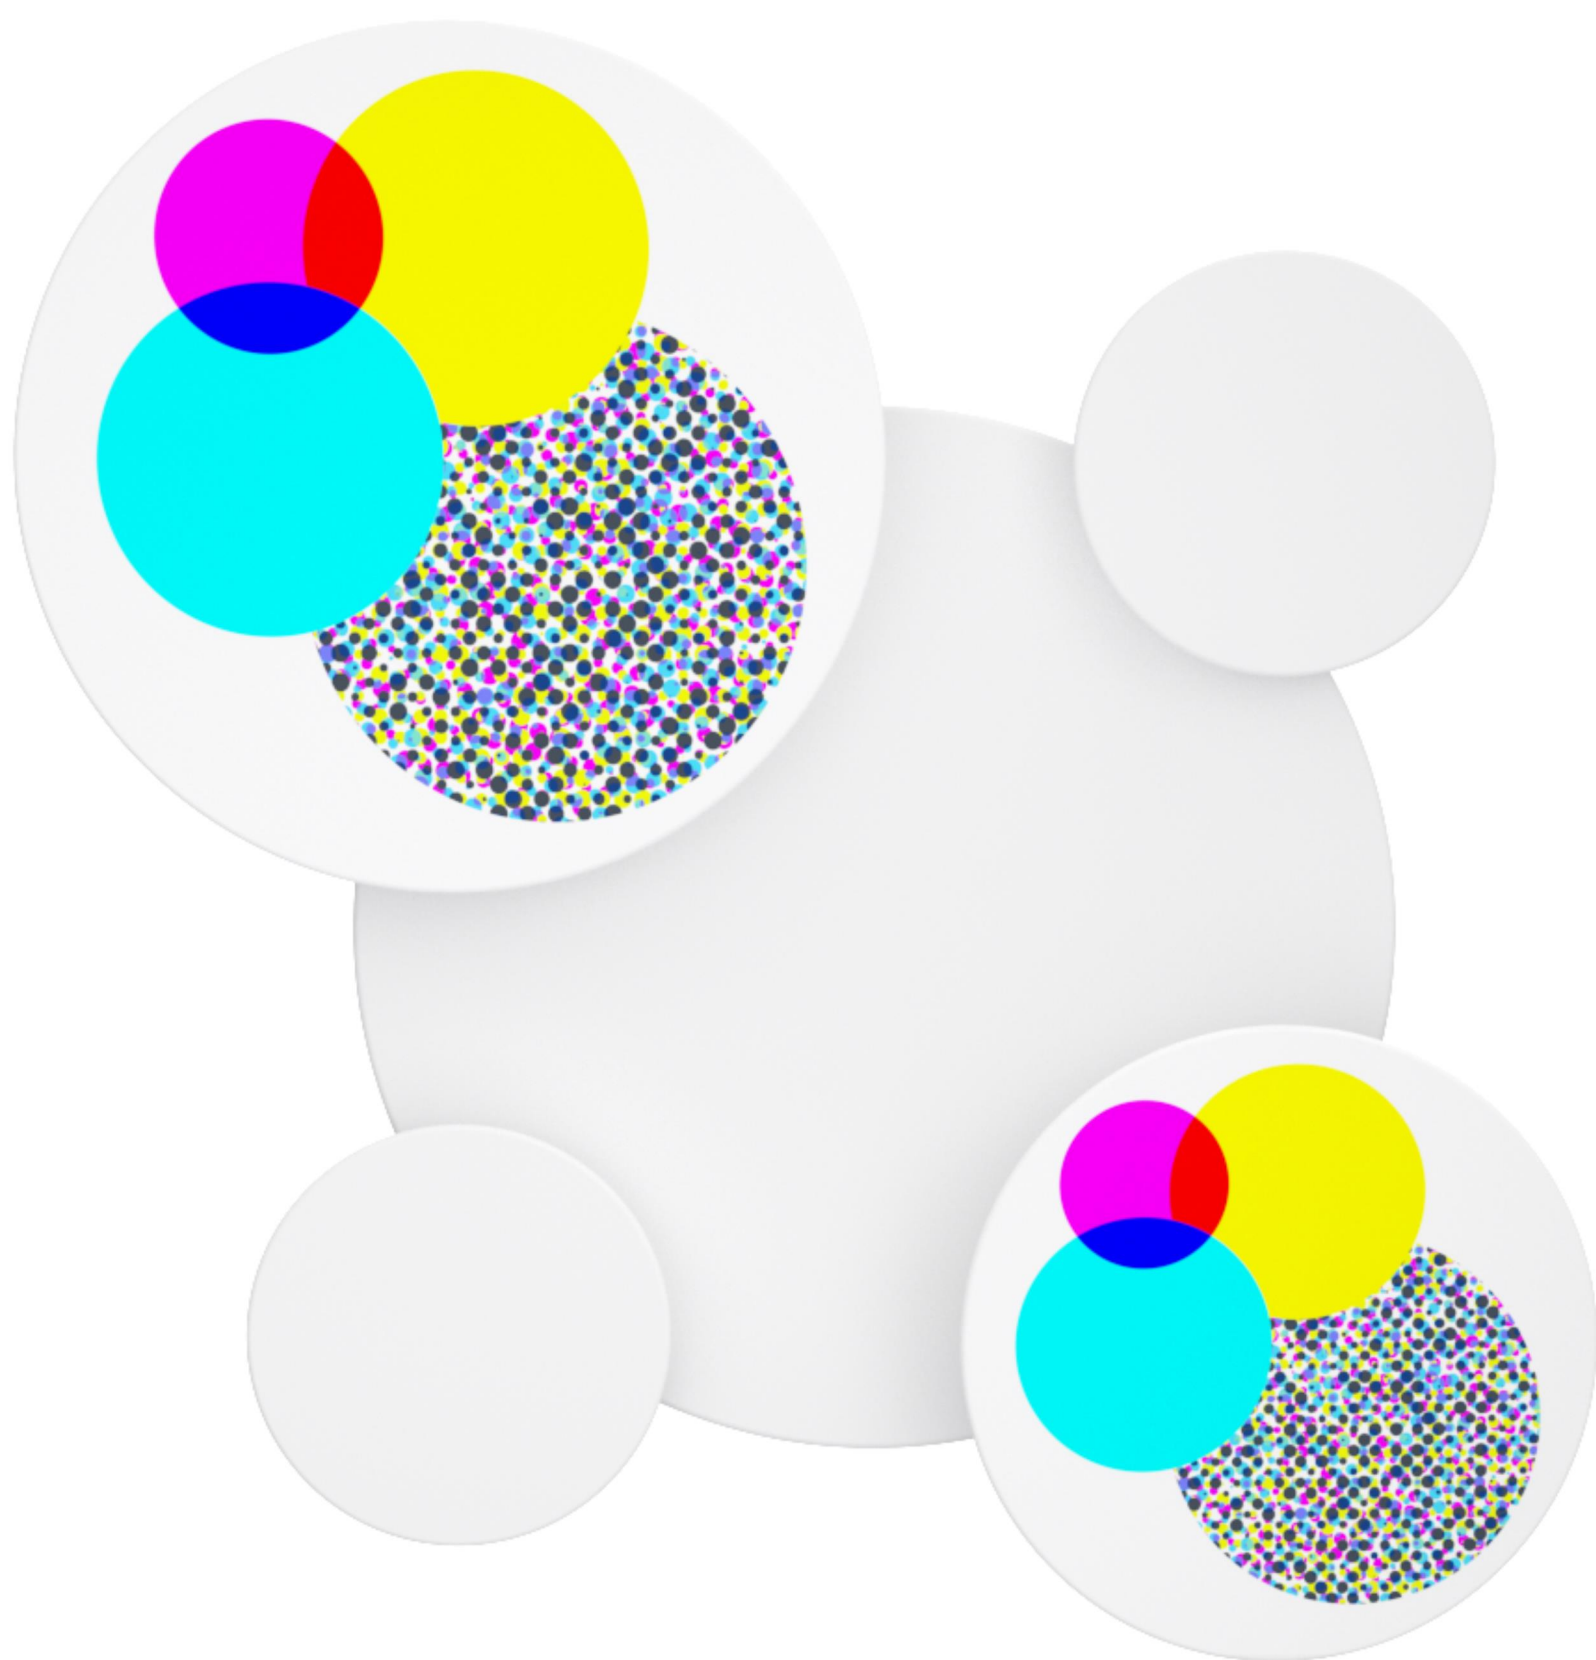

CIRCULAR SCREENS FOR PROJECTION, LIGHTING, OR PRINTING



MOSS
WE ARE PLACE MAKERS™

TABLE OF CONTENTS

1.0

Before You Build

3

Proper Fabric Handling

3

Included Parts and Recommended Tools

3

2.0

Product Construction

4 - 10

Frame Assembly Instructions

4 - 5

Fabric Tips and Tricks

7

Fabric Application Instructions

6 - 9

3.0

Fabric Care

10

Storage notes and methods

10

Cleaning and fabric care

10

Install questions?

Contact us. We are here to
help you succeed!

1.888.370.0202



BEFORE YOU BUILD


Proper Fabric Handling

To avoid smudges and dirt buildup on your fabric, always install your product using nitrile gloves. Even clean hands can leave an oily residue on the fabric surface that attracts dirt and dust. Additionally, consider using drop cloths or plastic sheeting on the floor to maintain a clean working environment free of debris.

Included in the Bag




Nitrile Gloves

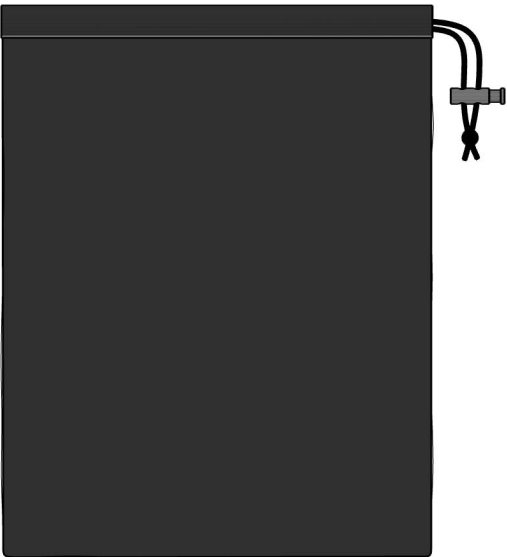


Storage Bag

(Not Included with Oversized Skins)

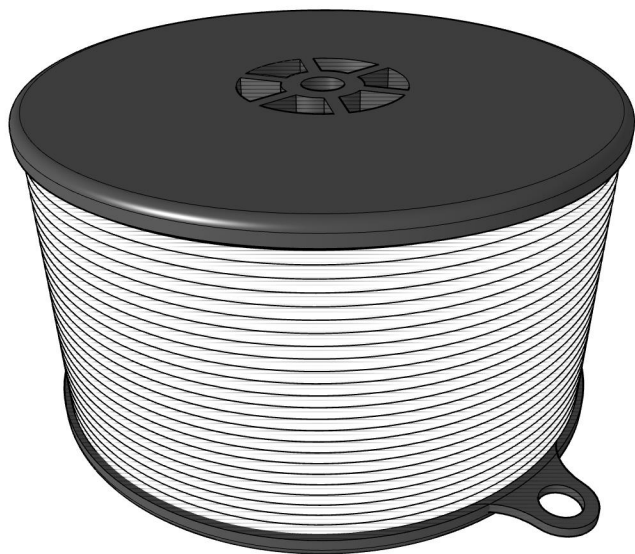


Monofilament Line

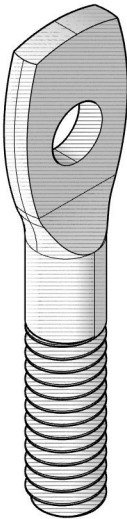

1/4-20 Tiny-Eye

Recommended Tools

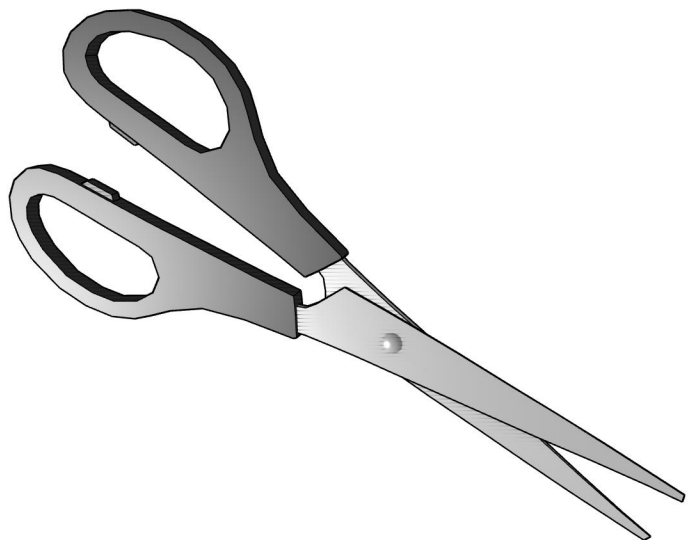

Scissors




Tape Measure

PRODUCT CONSTRUCTION

Frame Assembly




- 1

Establish a clean working environment. Consider using drop cloths or plastic sheeting to maintain a debris-free surface.

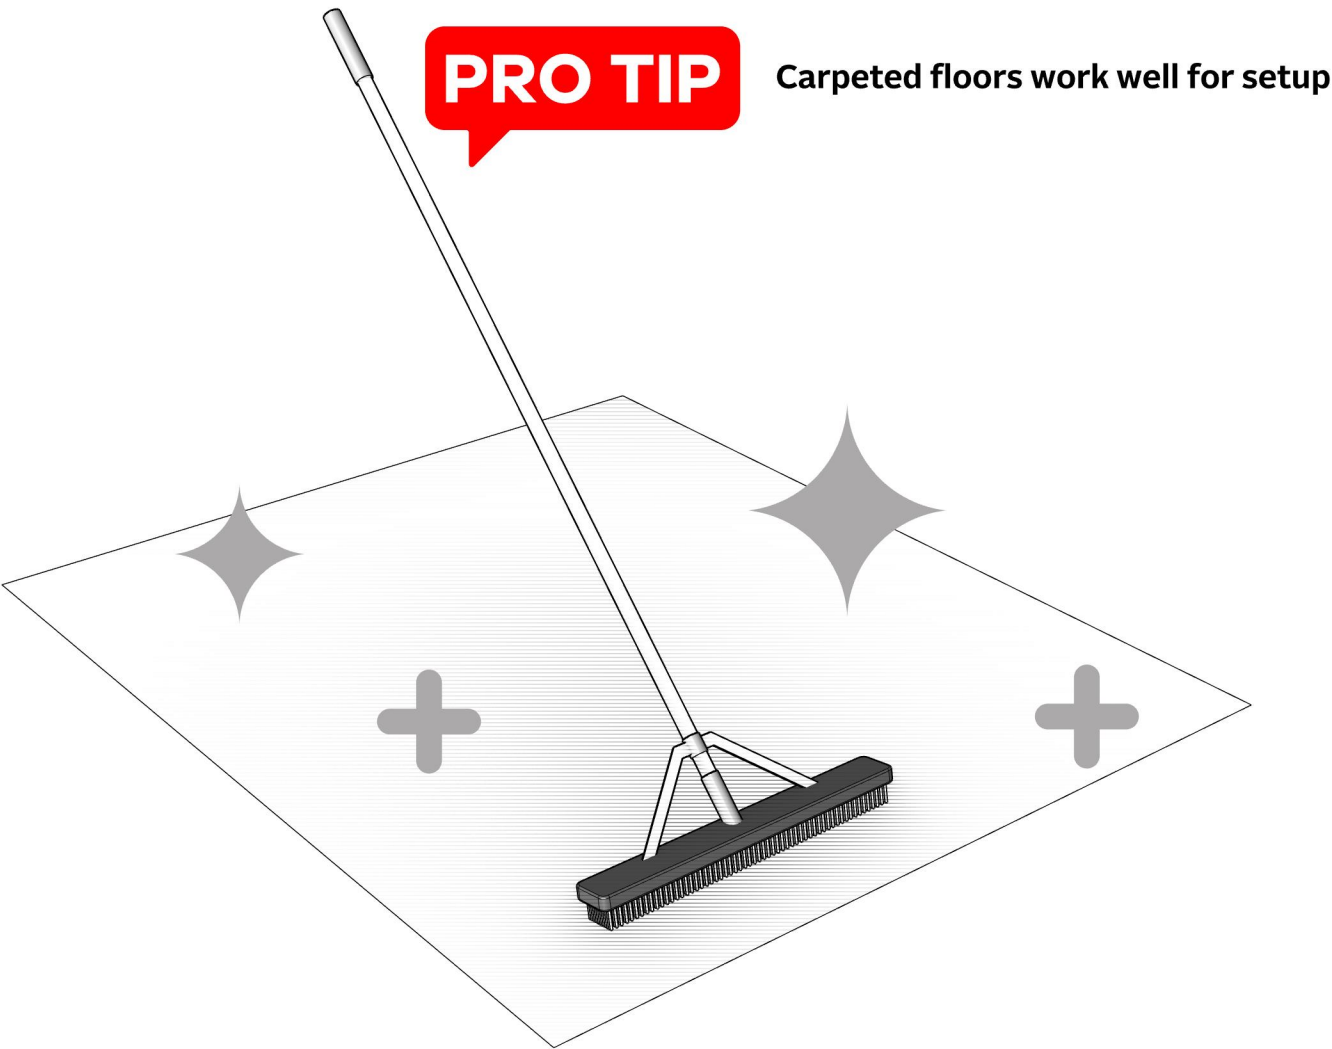





- 2

Unpack your frame and fabric cover. Familiarize yourself with assembly labels. **Full Moon frame segments come with joints that are labeled with numbers, and each side of a joint has the same number.**

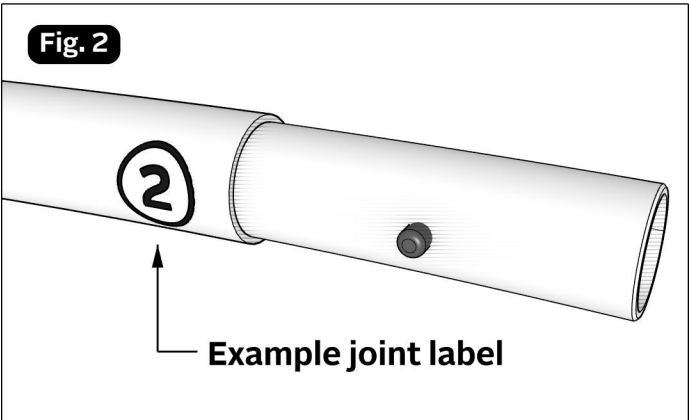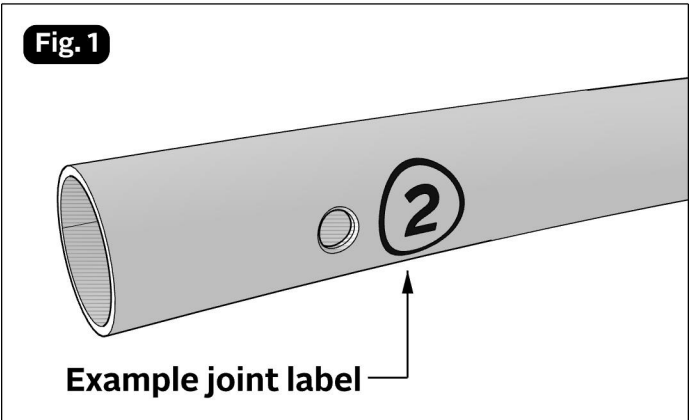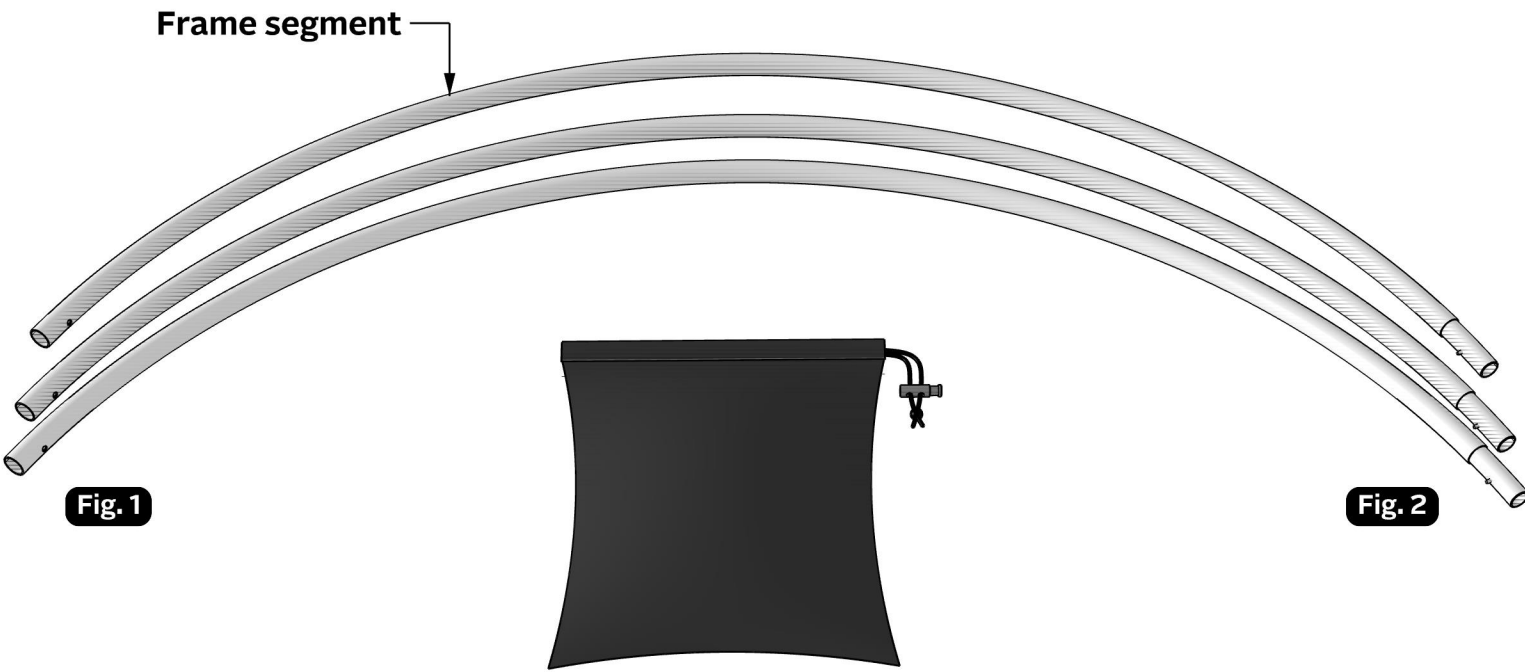

3

Construct your Full Moon frame. Connect each joint together by matching a label with its corresponding part (1+1, 2+2, etc.). **Insert the sleeve with the button stop until the click button releases into the pre-drilled hole.**

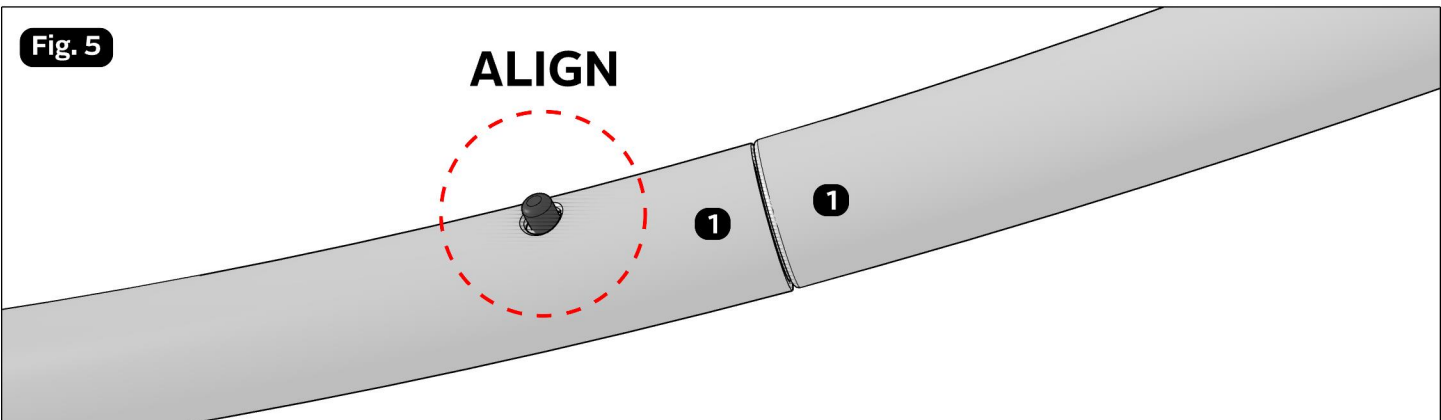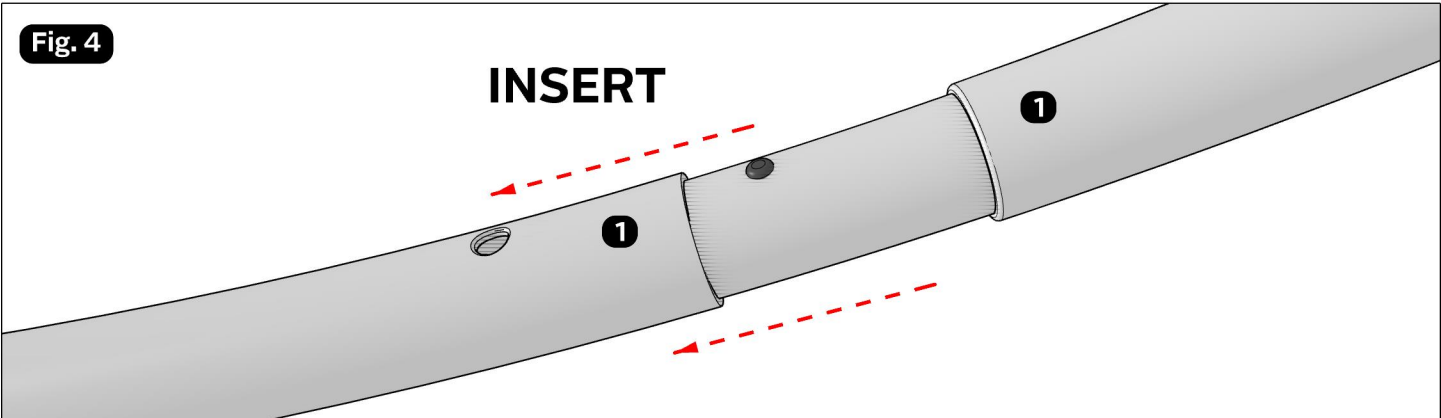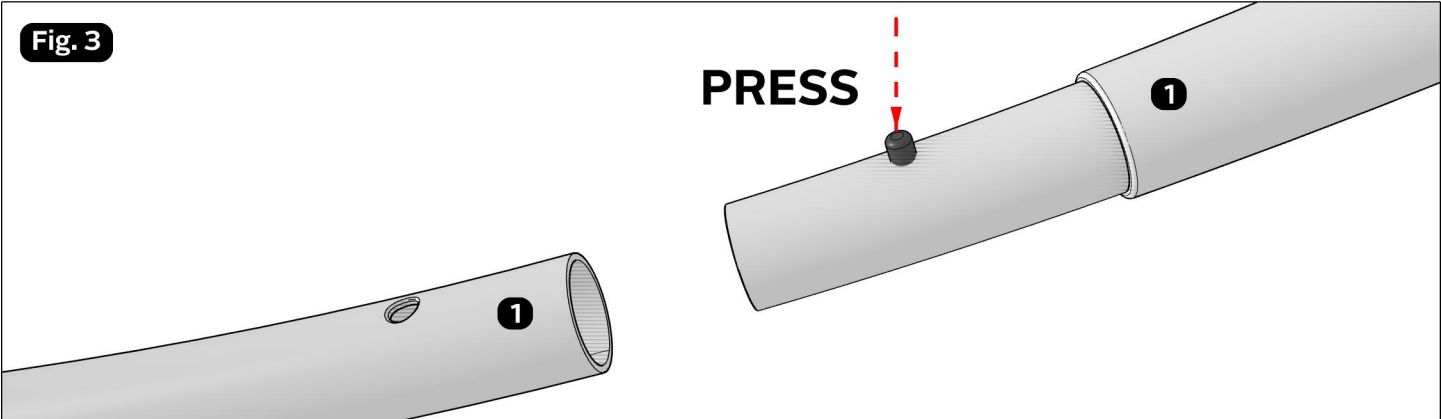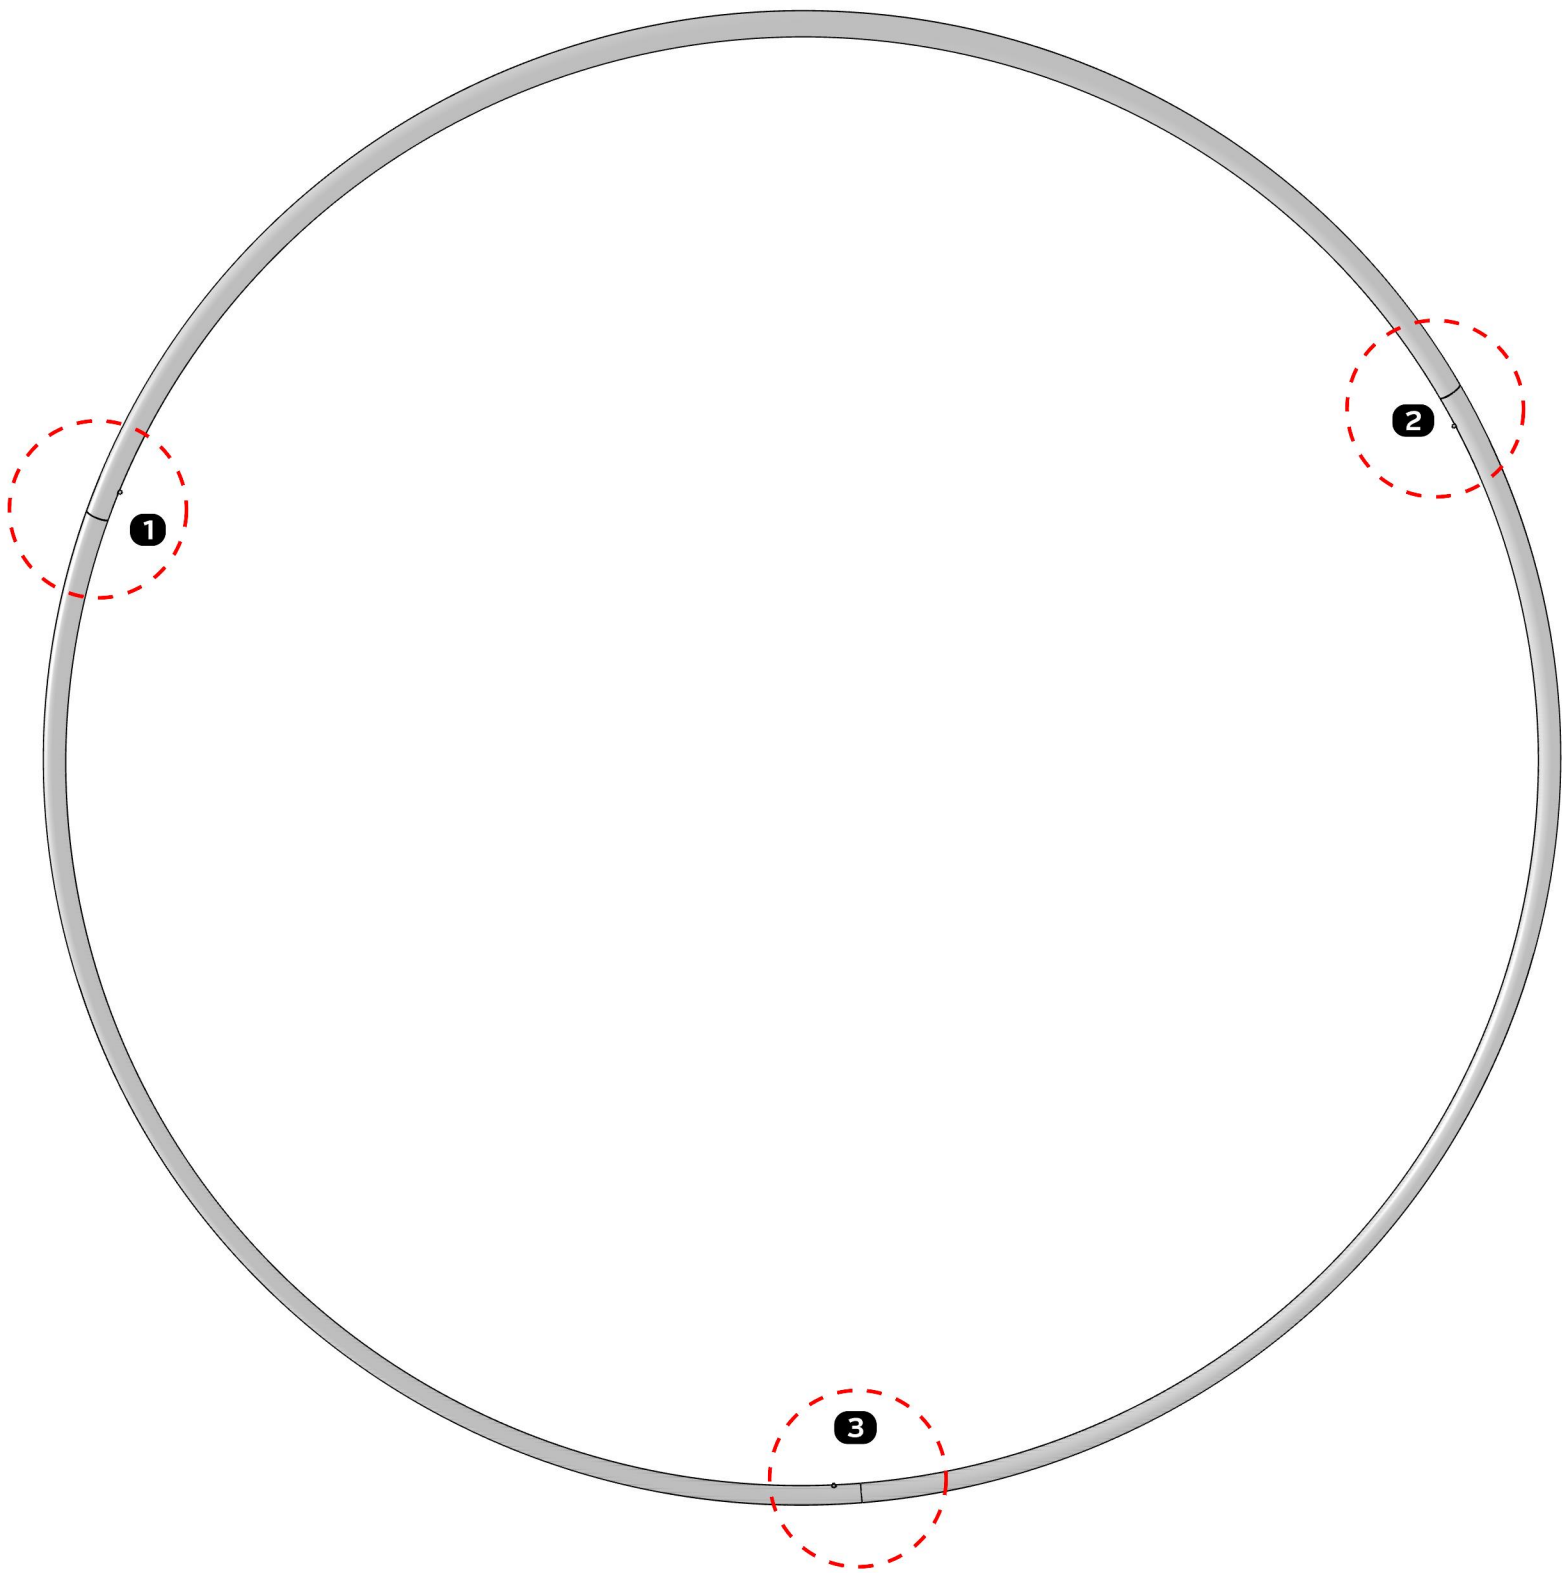



PRODUCT CONSTRUCTION

Fabric Application

- 1




Establish a clean working environment. Consider using drop cloths or plastic sheeting to maintain a debris-free surface. Put on your nitrile gloves.
- 2

Identify the front and back of the frame. **The back is identified by 1/4-20-rivet nut locations.** Rigging hardware attaches at these locations. When applying a fabric cover, the back of the frame should be face up.

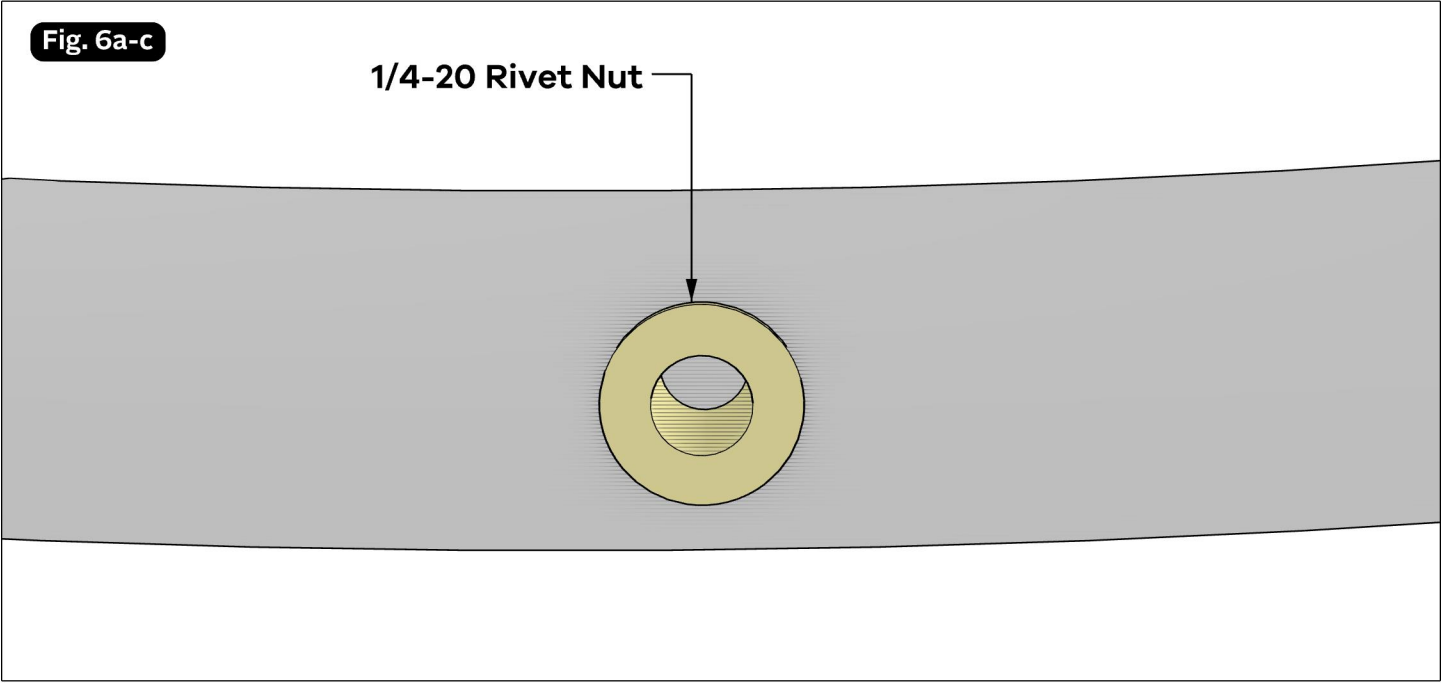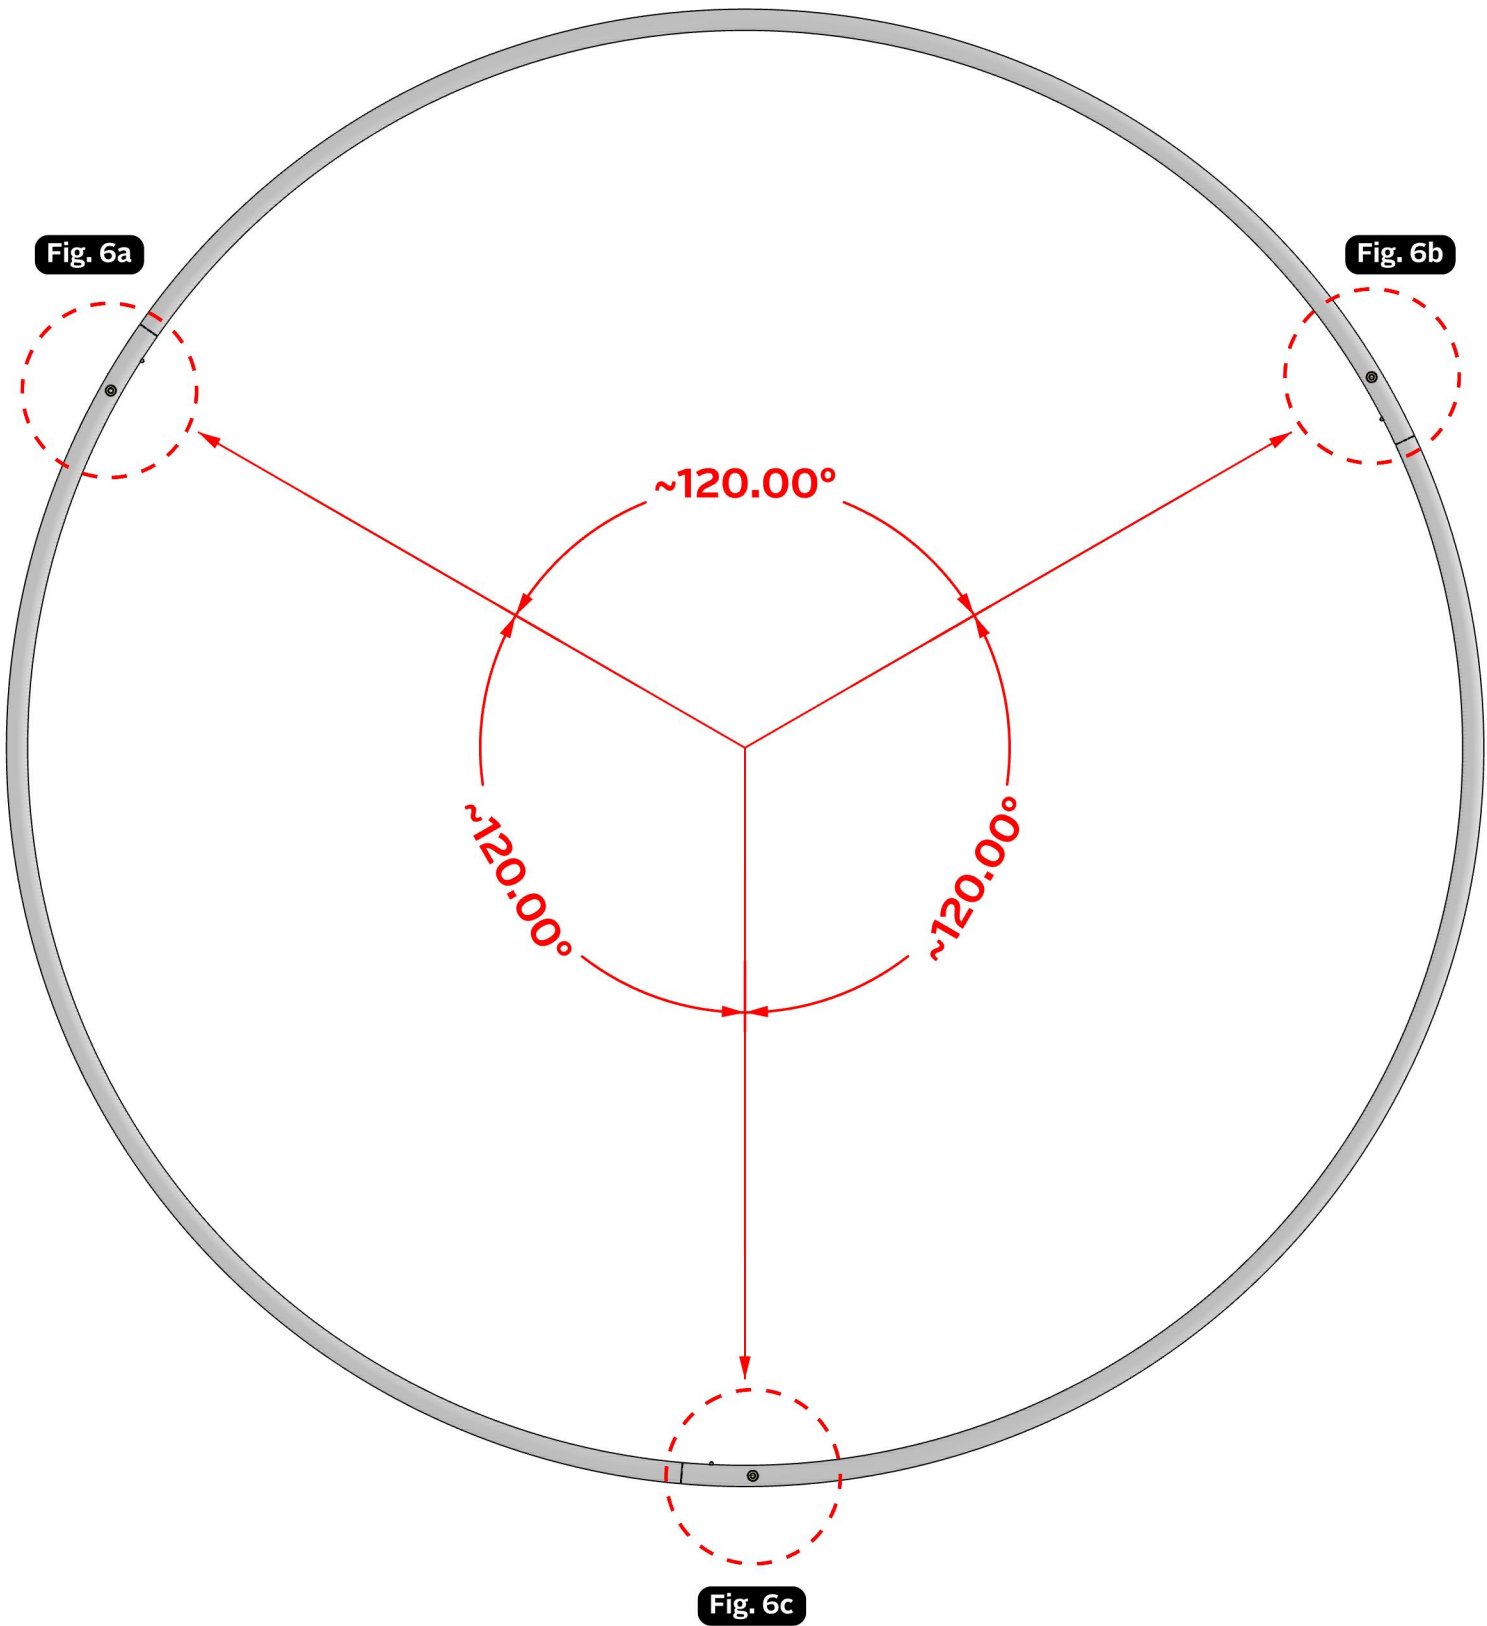


3

Identify the front and back of the fabric skin. **The back face is identified by a small rigging opening in the zipper near one of the zipper ends.** The back fabric face should coincide with the back of the frame when applied.

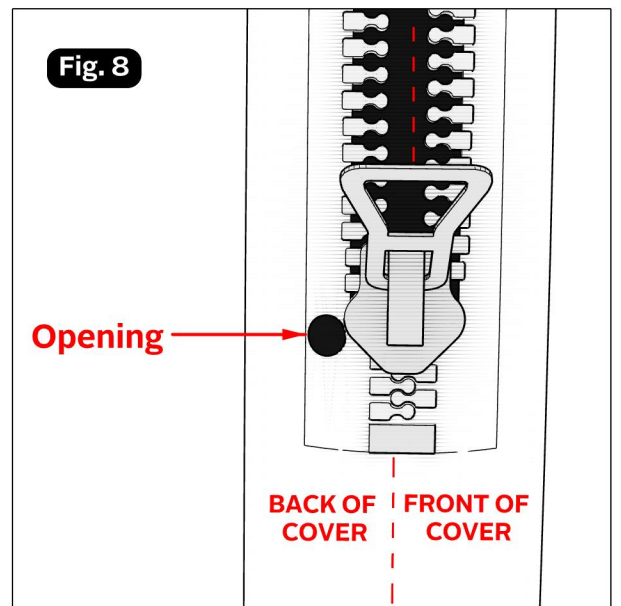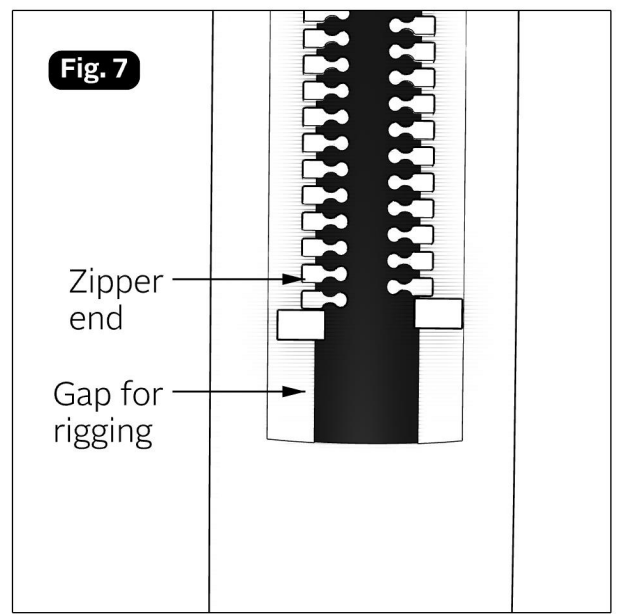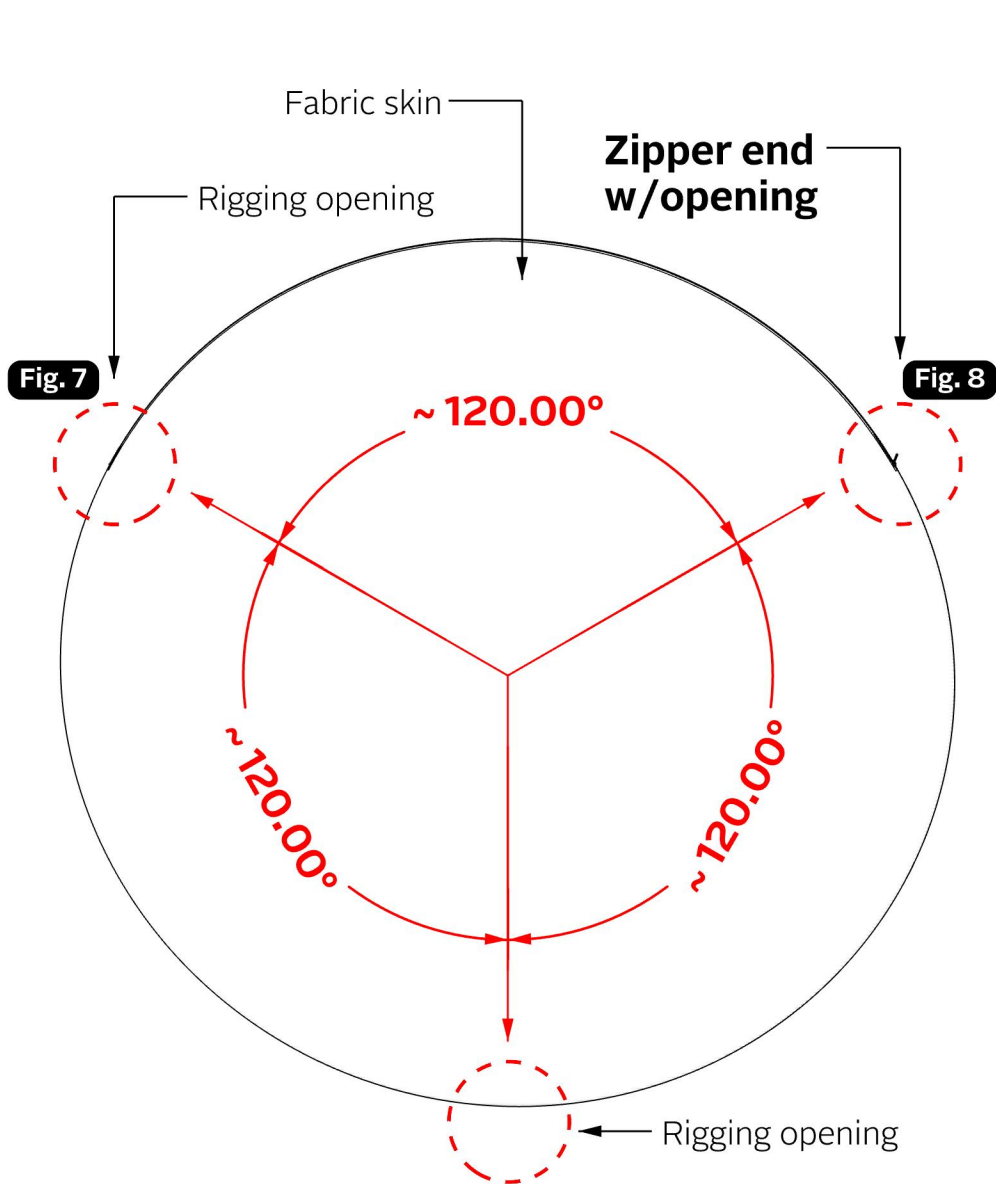




4

Unzip your fabric skin. With the rivet nut inserts and back of the frame facing up, pull the fabric skin over the assembled Full Moon frame. **Rotate the skin around the frame so the zipper ends from step 3 are close to the rigging points from figure 6 in step 2.**

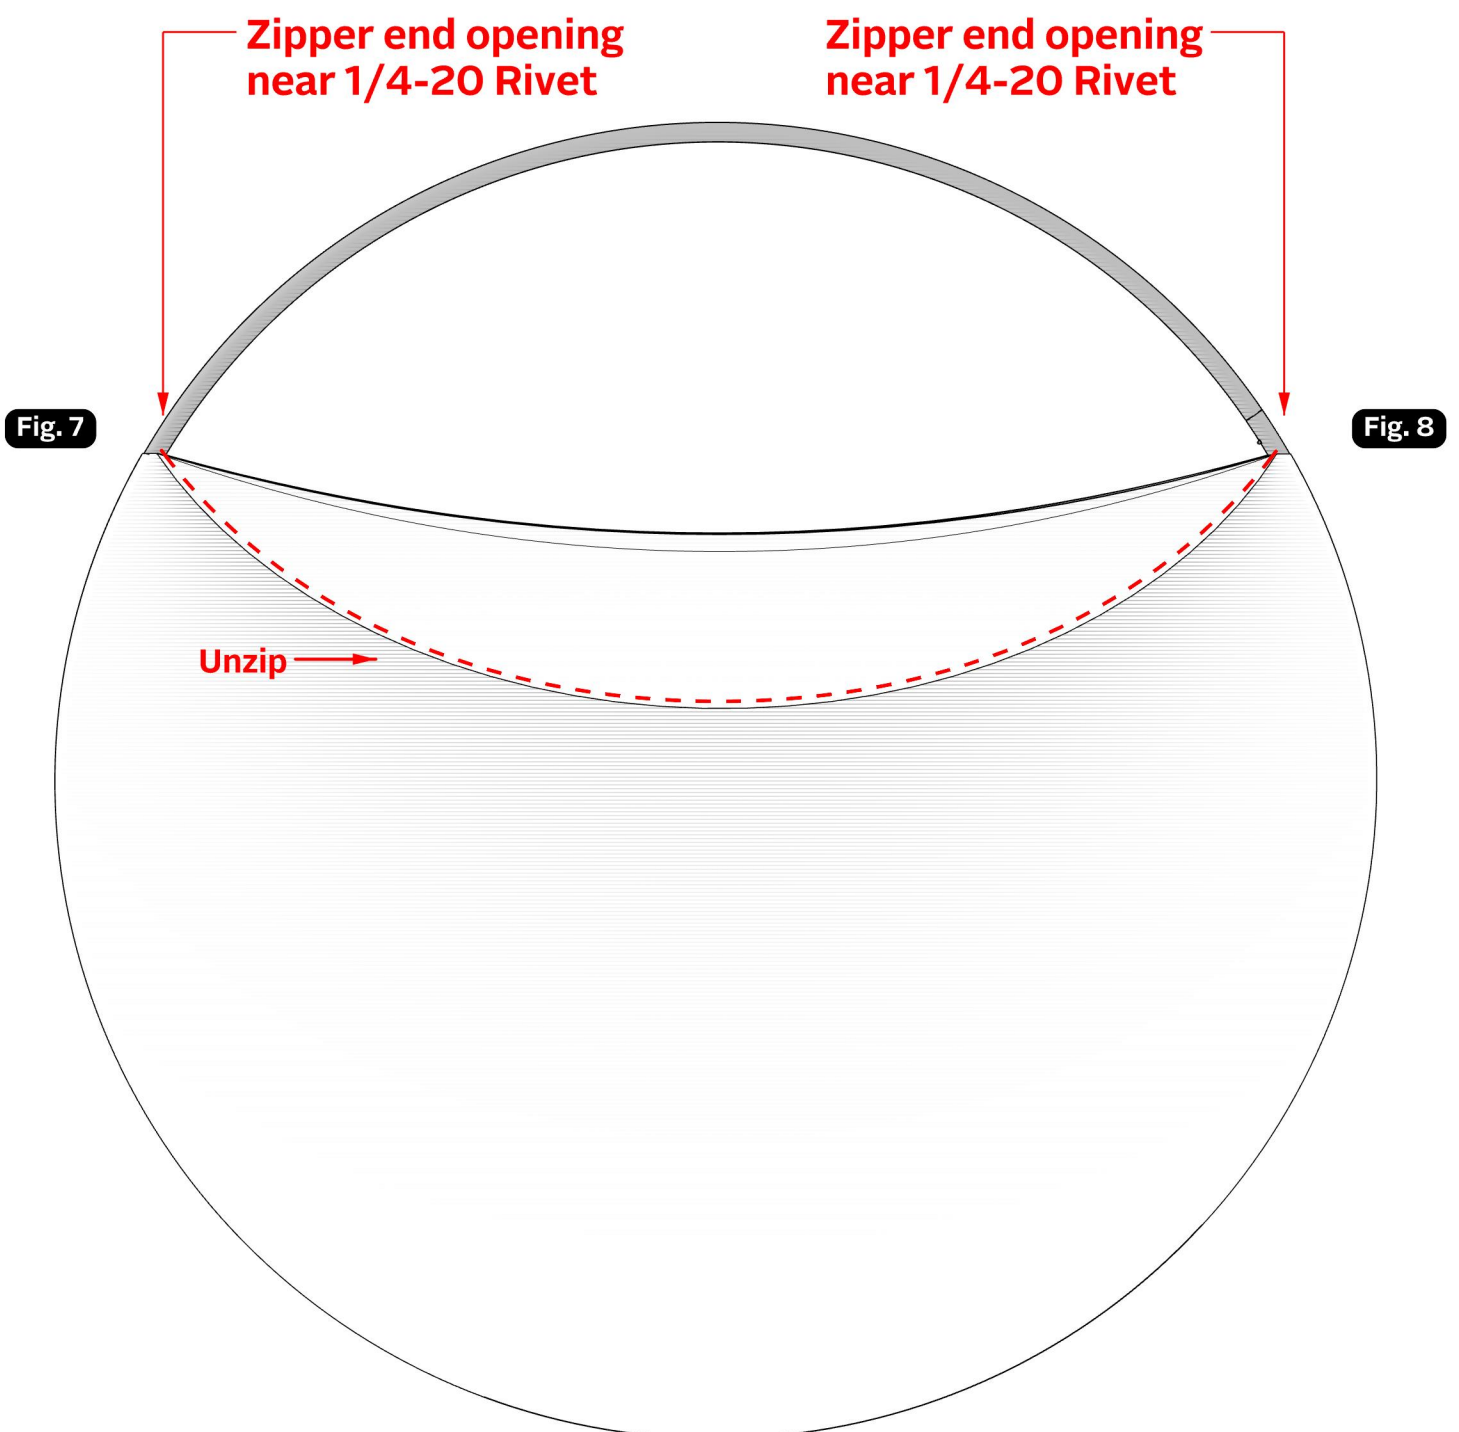


5

Screw the 1/4-20 “tiny” eye bolts into the rivet nuts on the frame to help hold your fabric skin in place. One goes through the rigging point opening near the start of the zipper. Another will go at the end of the zipper.

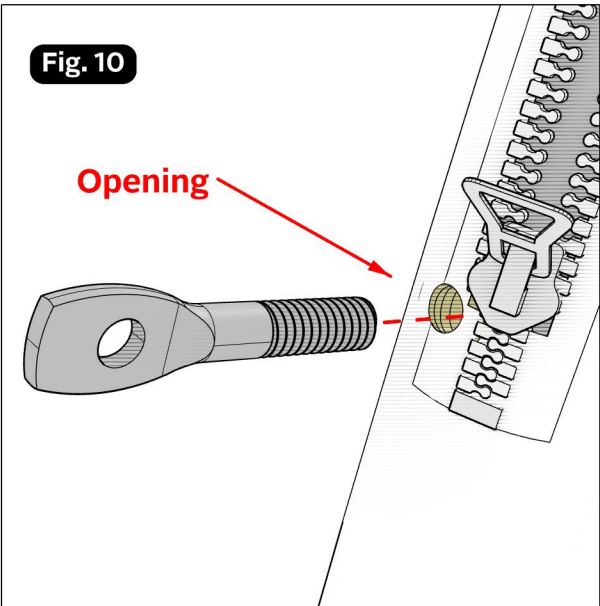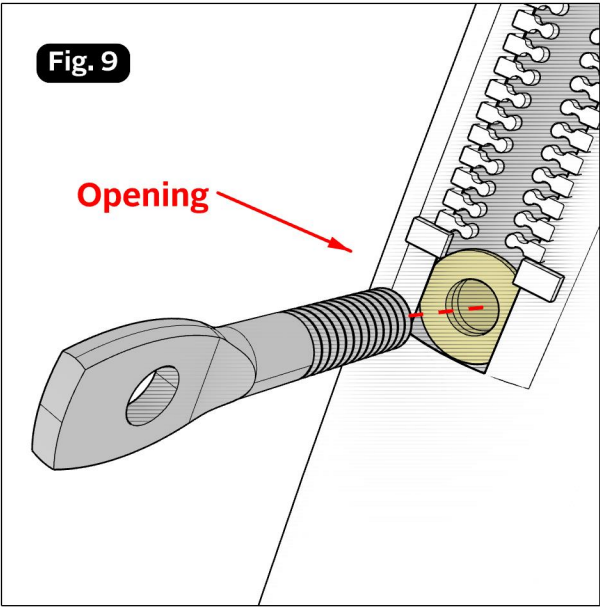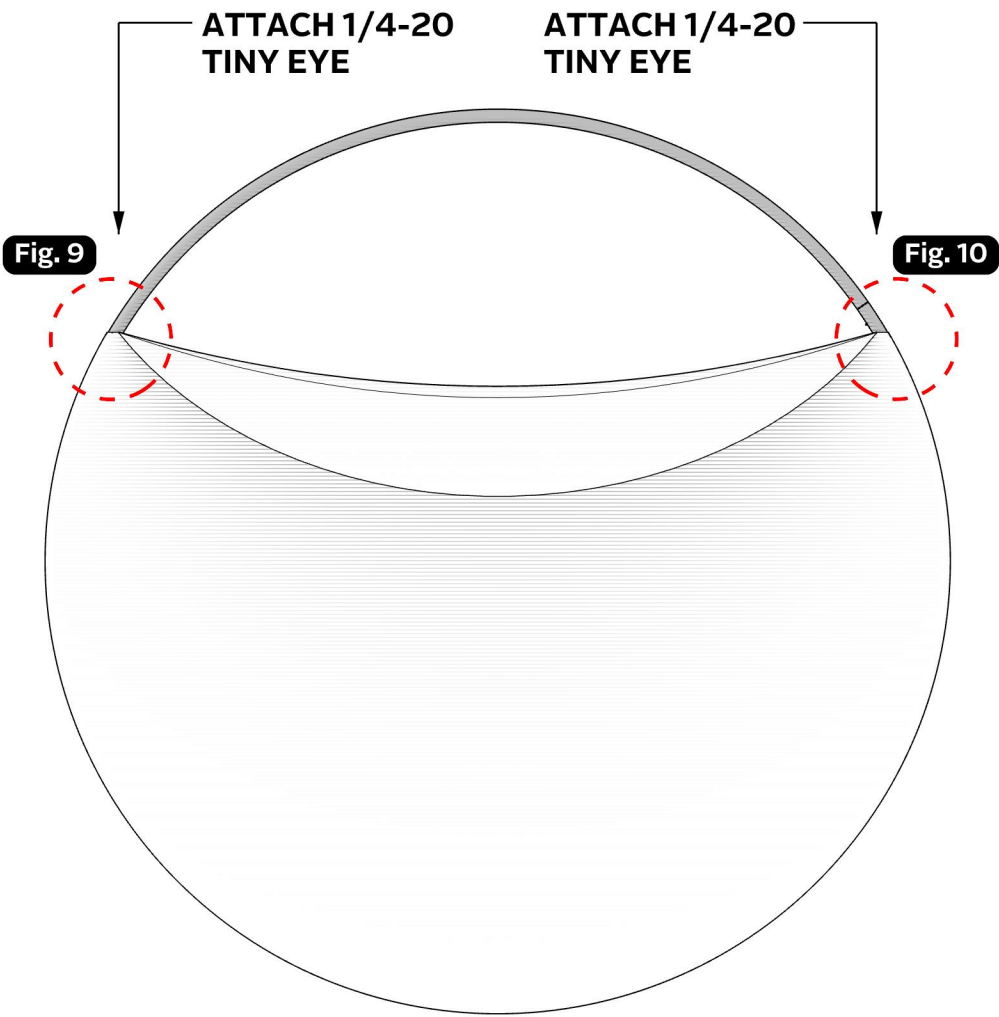



6

Zip the fabric skin shut.

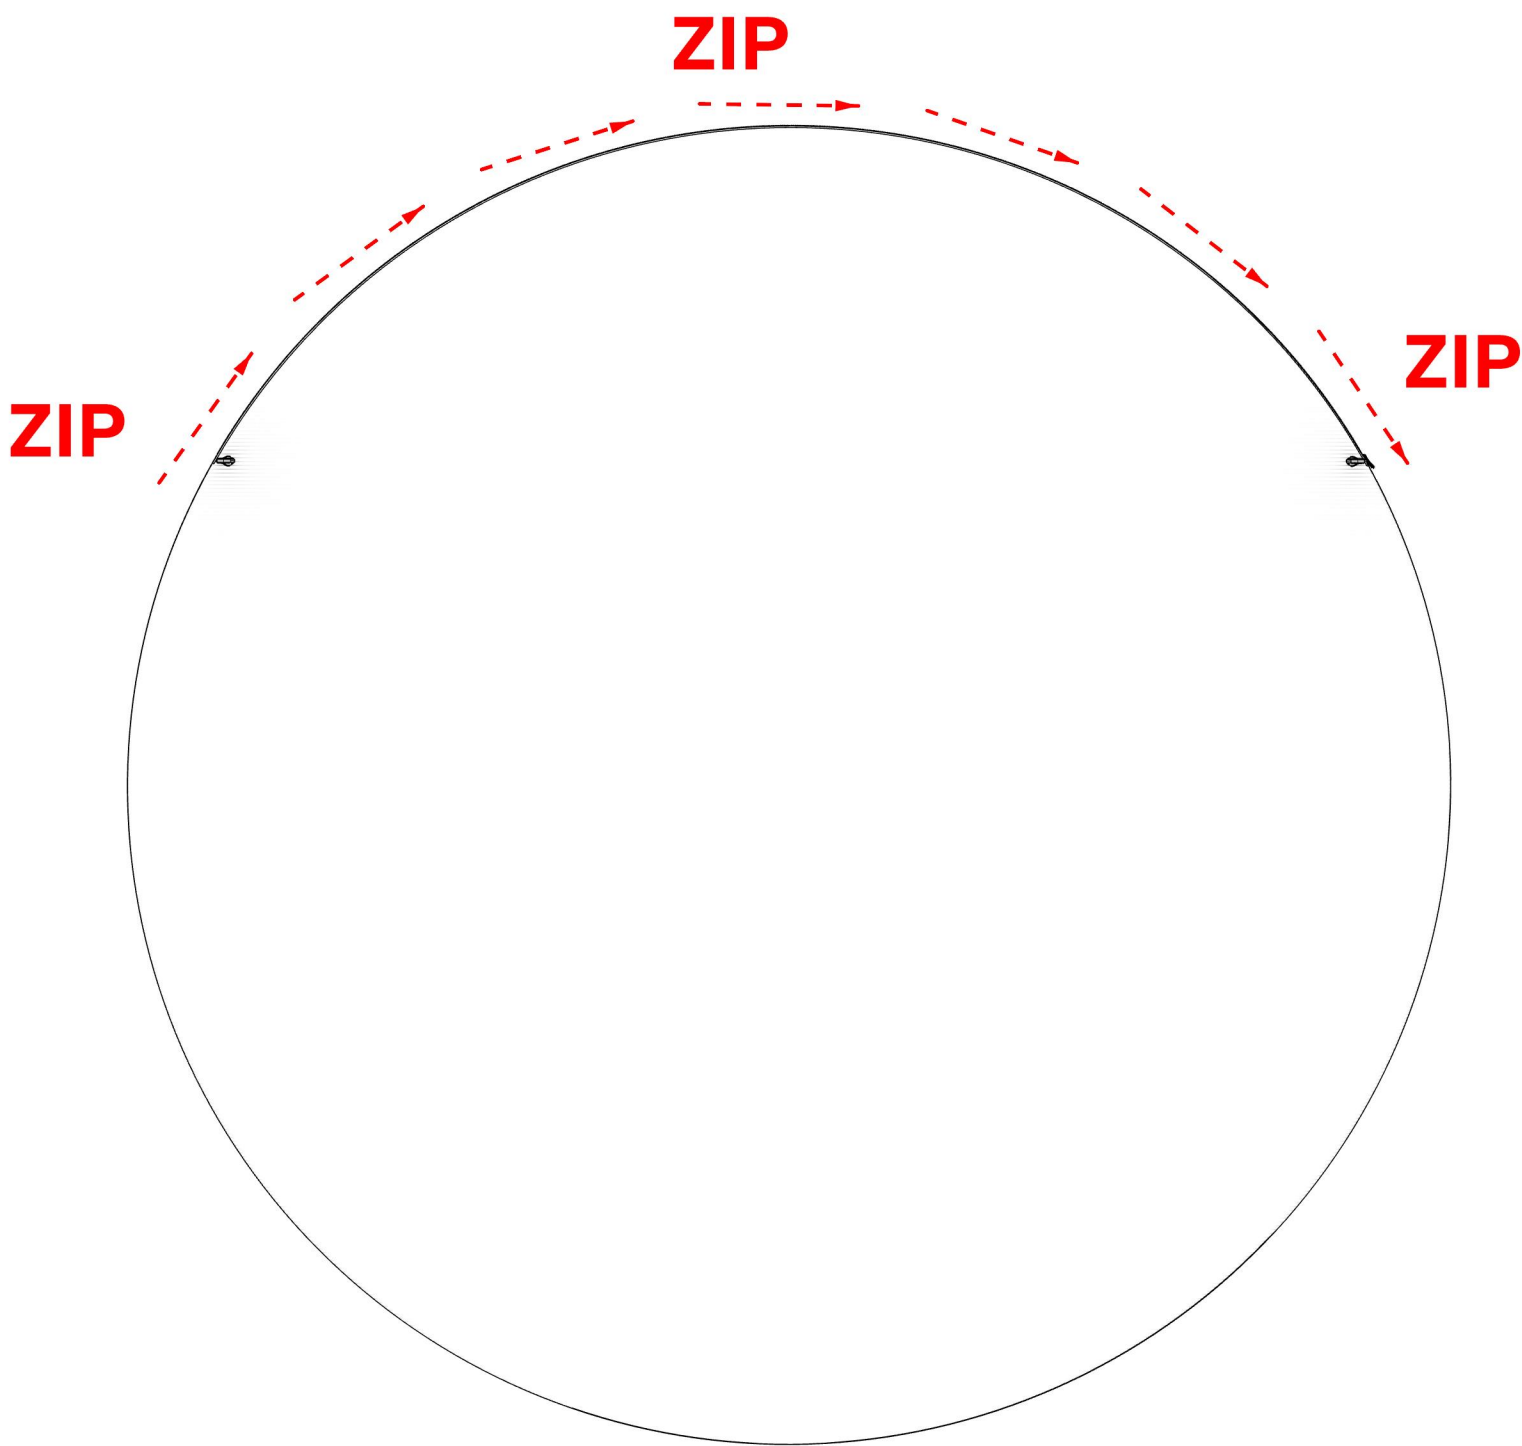




7

If you plan to rig your Full Moon horizontally, use the third small finished opening that is on the opposite side from the zipper section. Screw the 1/4-20 "tiny" eye bolt into the rivet nut on the frame.

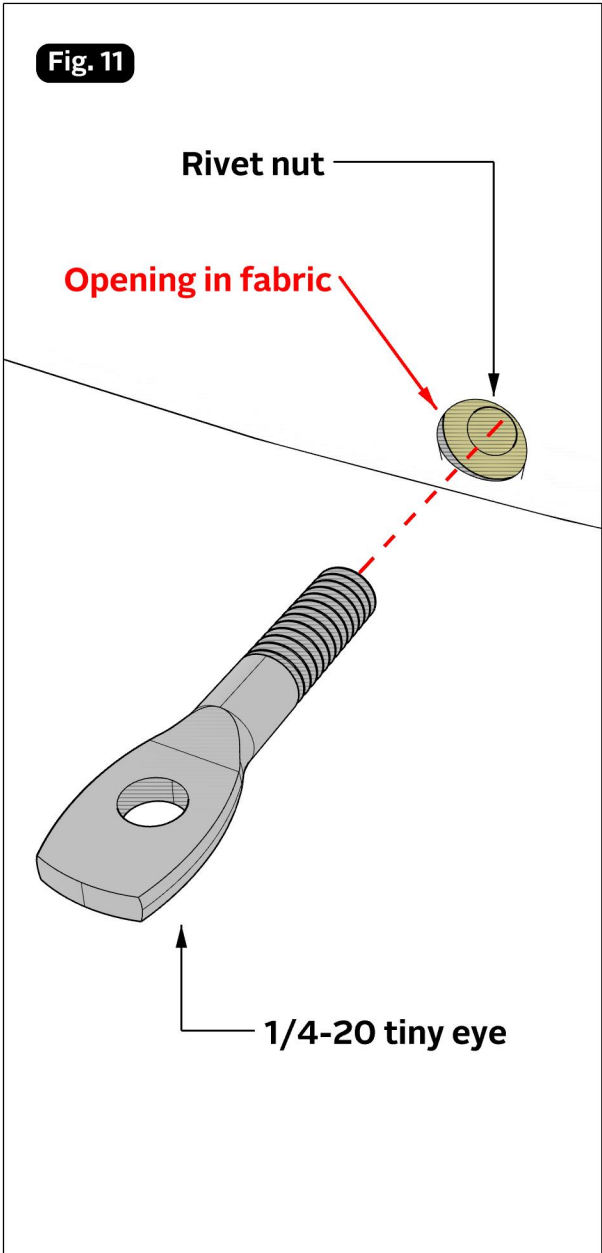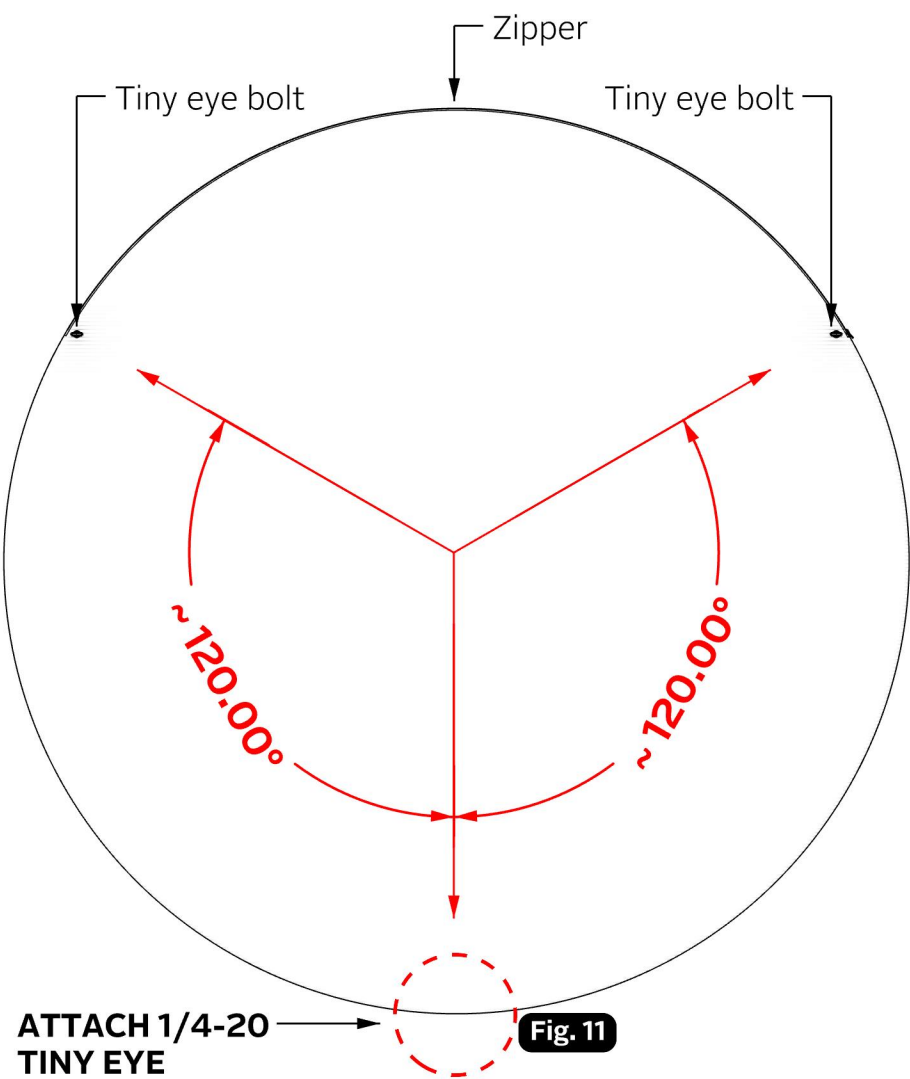


8

Use scissors to cut the provided monofilament rigging line into equal lengths of your choice. For vertical rigging, attach line to two of the eyes. For horizontal, attach line to all three of the eyes.

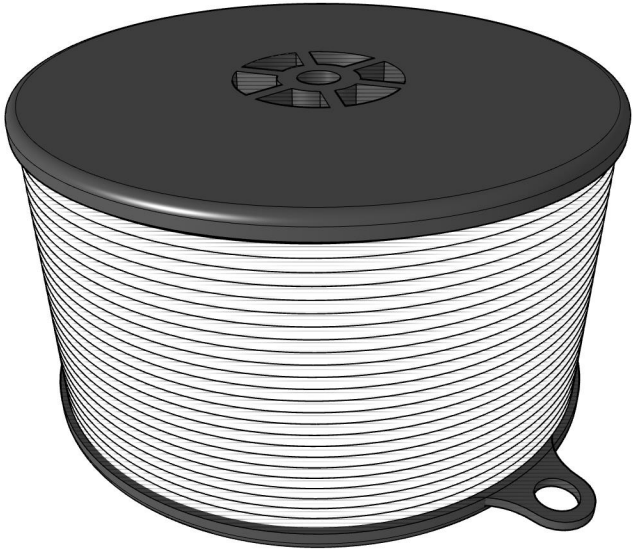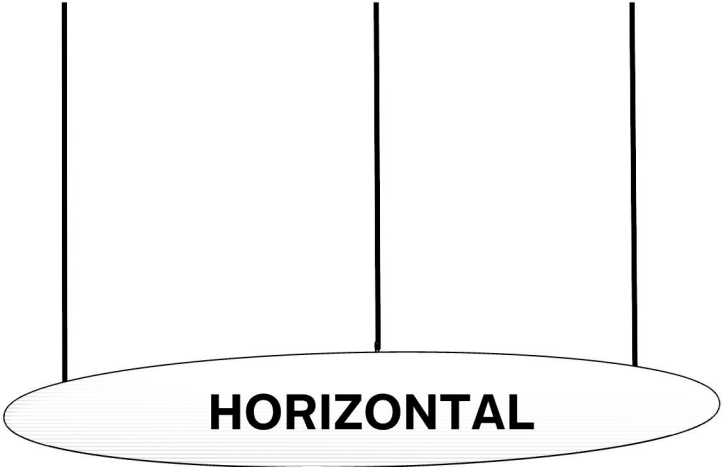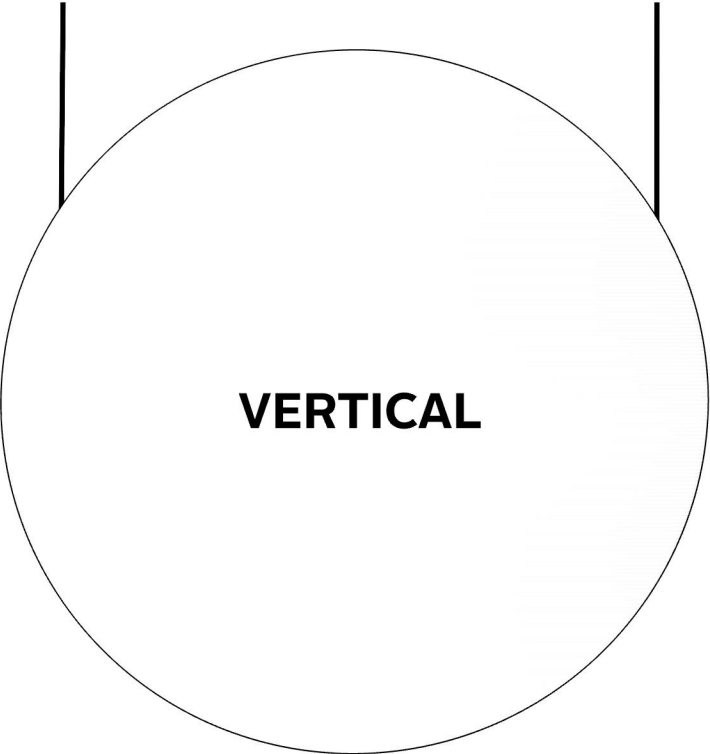

Monofilament Line

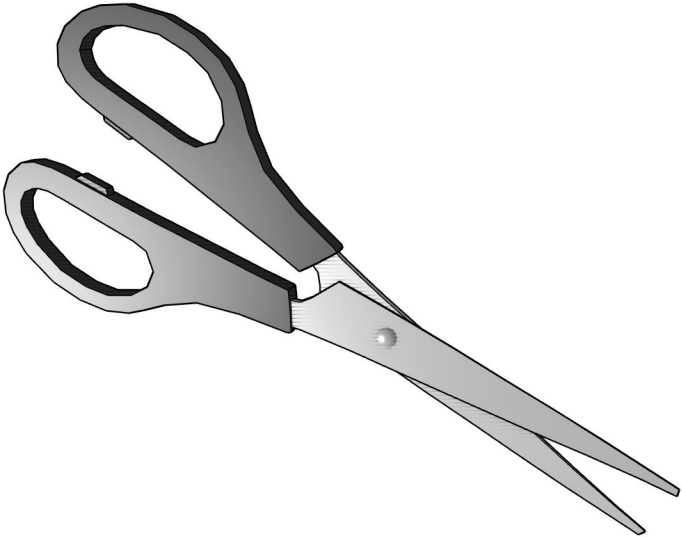

Scissors

FABRIC CARE

UNIVERSAL STRETCH FABRIC (USF)

Storage Notes and Methods

Qualified orders include a cloth drawstring bag, which is ideal for long-term storage. When storing your fabric in a sealed container, like the plastic bag the skin arrived in, the fabric must be completely dry to avoid mold or mildew growth.

If your product includes any metal parts such as gate ring, rigging supplies, or frames, be sure to remove them prior to storage. Wrinkles can result from fabric storage. Almost all wrinkles from storage will stretch out once the fabric is installed correctly. If deep wrinkles persists, place fabric in a dryer on low heat for a few minutes.

Cleaning and Dusting

Light clean: Fingerprints from installation without gloves are the main culprit of a dirty screen. Follow the setup instructions carefully, and always use nitrile gloves when handling fabric skins. To remove light stains, use hot soapy water and dab the area clean.

Deep clean: Machine wash fabric on delicate with detergent and Oxiclean®. Machine dry on low heat, regularly checking for completion. IFR products dry quickly. All USF products will retain IFR (Inherently Flame Retardant) certification after repeated washes.

Dusting: We understand that many of our products may be left up over long periods of time. Dust will inevitably stick to the surface and collect. To remove dust on fabric, use a clean object to lightly bat the back surface. Start at the center of the fabric and move towards the outer edges.



DO NOT OVER DRY. Extended heat will damage the spandex in the fabric material.




DO NOT USE BLEACH or bleach-based cleaners on USF fabric. Bleach will damage the spandex in the fabric.



MOSS

WE ARE PLACE MAKERS™

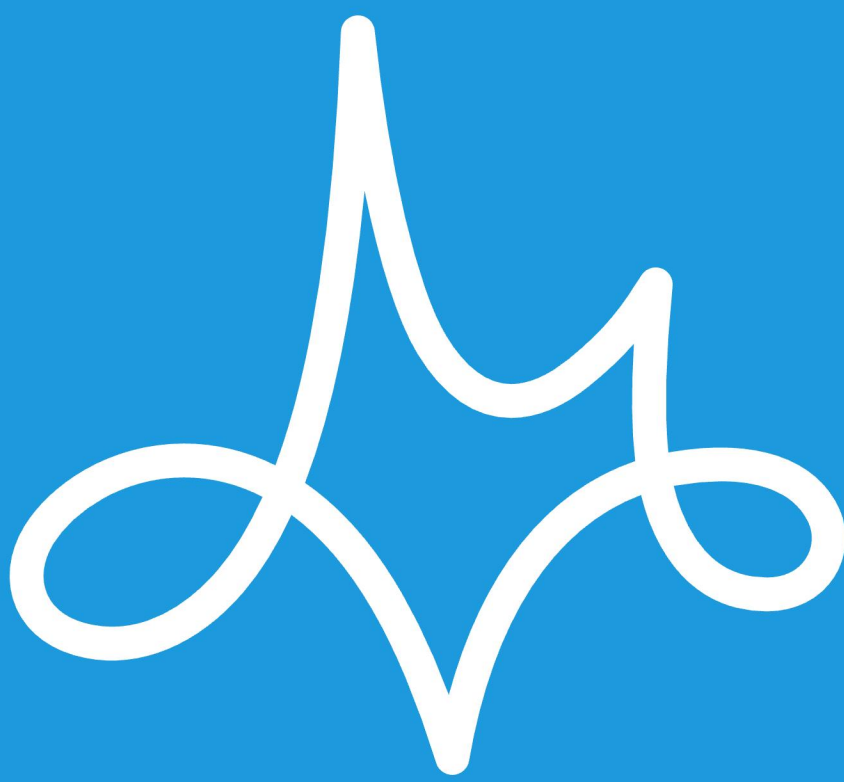

MOSS

WE ARE PLACE MAKERS™