


PANEL WALL TILES

INSTALLATION & MAINTENANCE GUIDE



MODULAR FABRIC WALL SYSTEMS CAPABLE OF CUSTOMIZABLE PRINTS FOR MEMORABLE BRANDING AND STAGING BACKDROPS

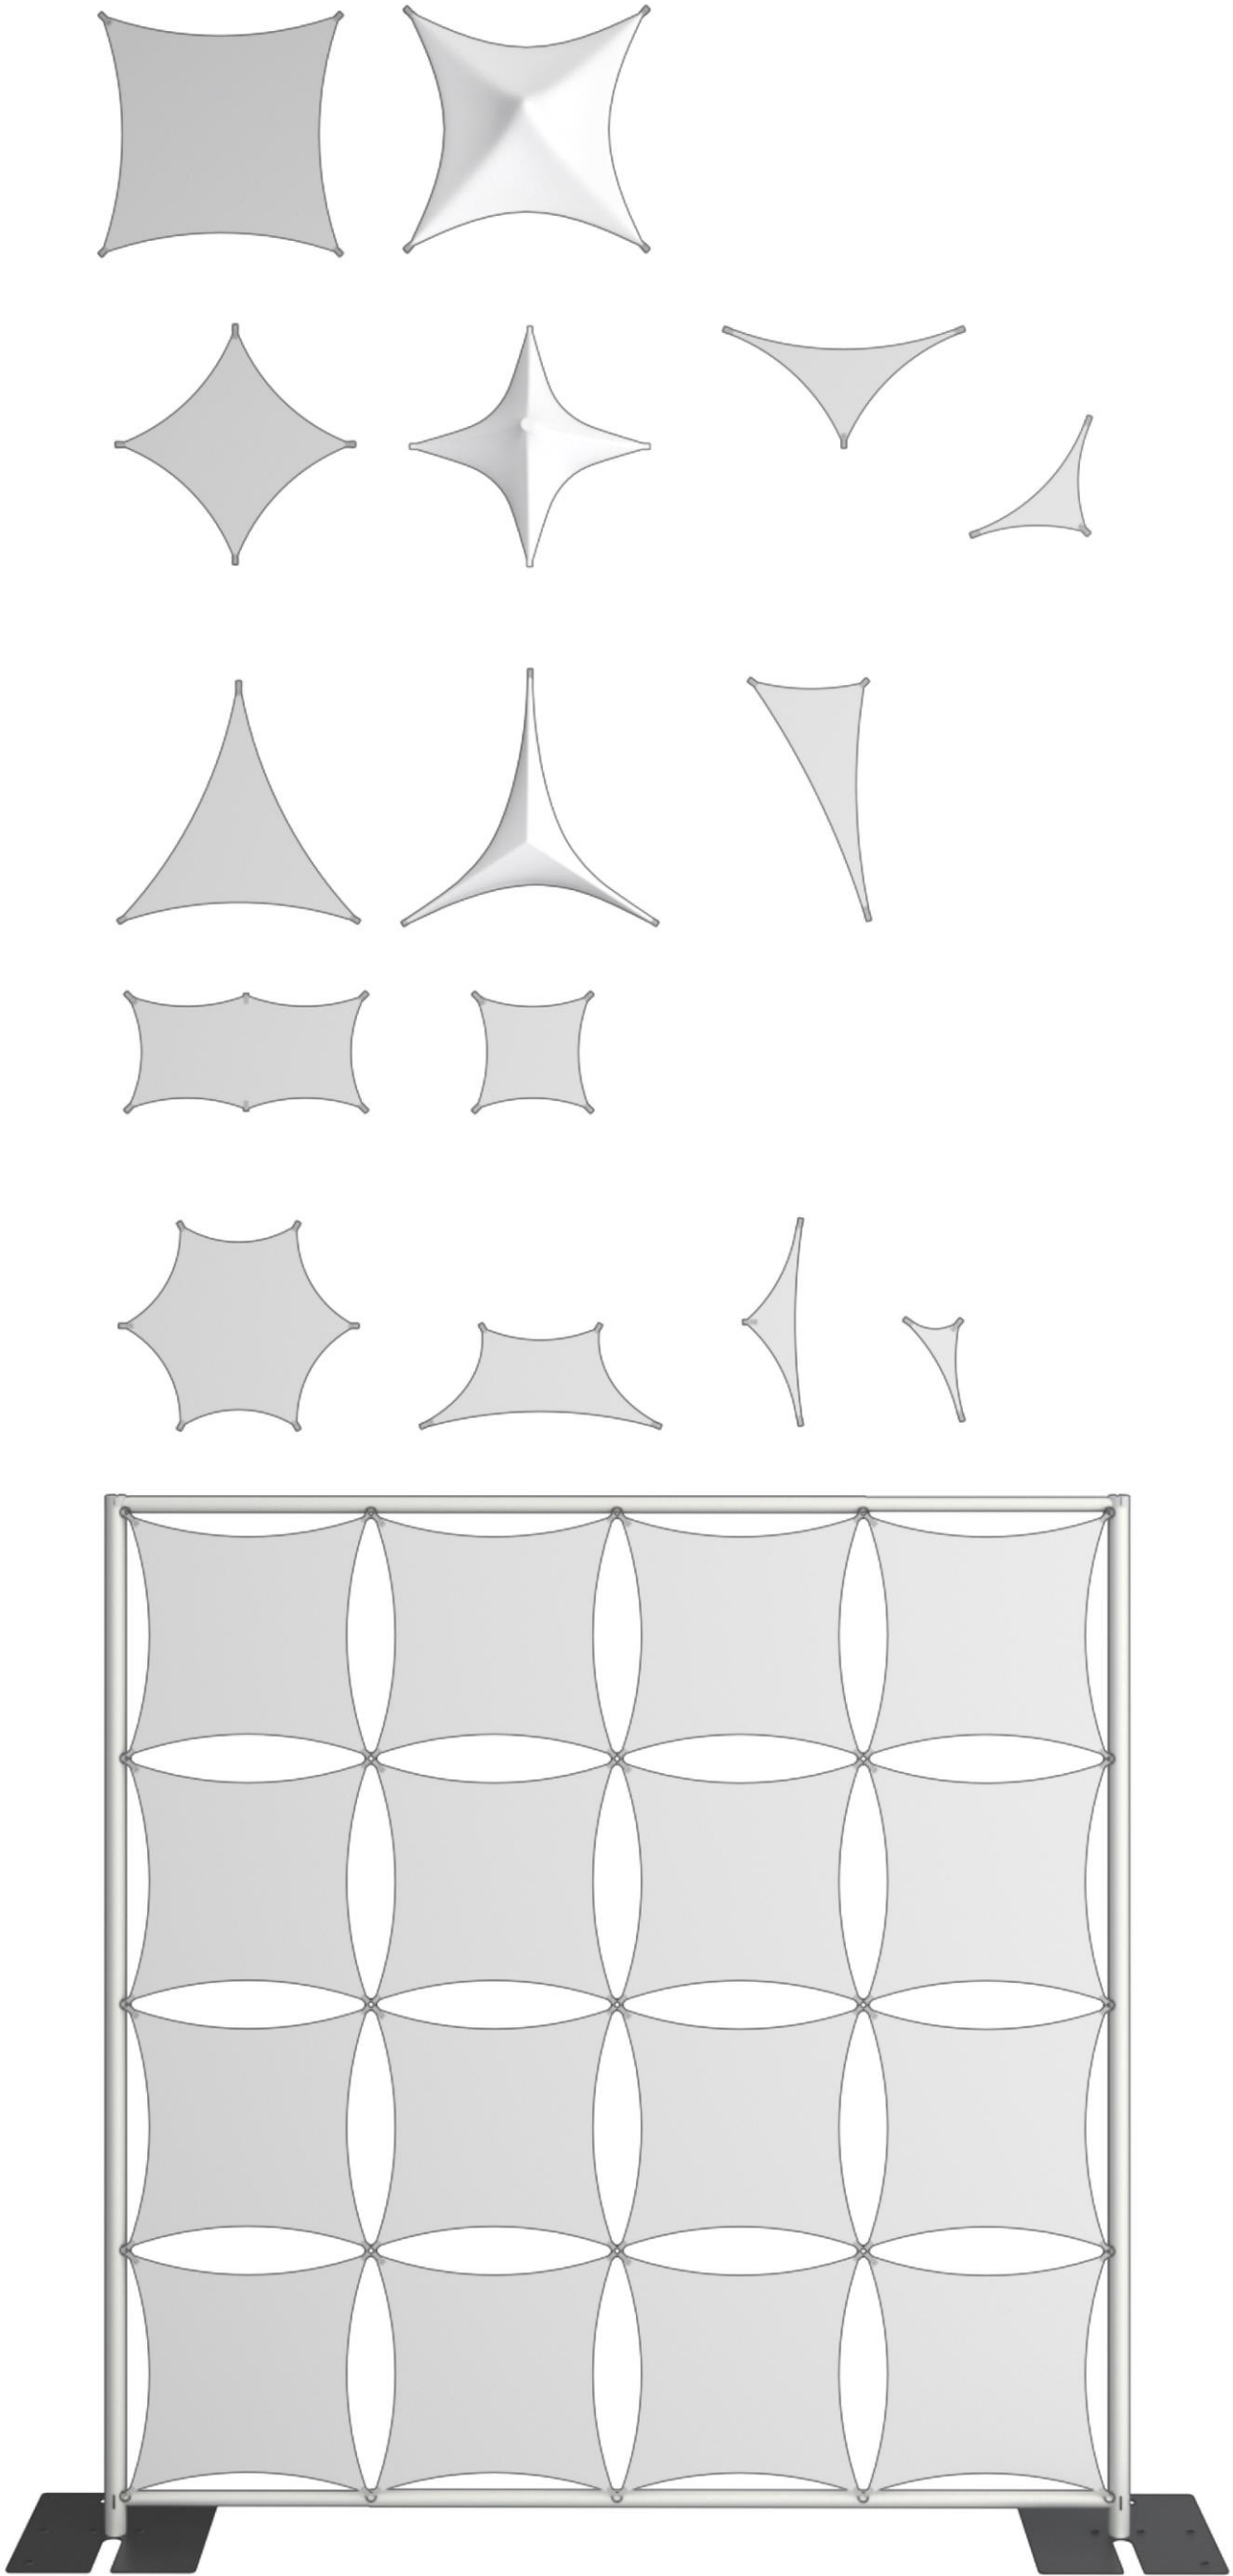

MOSS
WE ARE PLACE MAKERS™

TABLE OF CONTENTS

1.0	Before you build	3
	Proper fabric handling.....	3
	Included parts and recommended tools	3
2.0	Product construction	4 - 11
	Assembling your panel wall	4 - 8
	Mounting your assembled panel wall	7 - 10
	3D Panel Wall Tiles instructions	11
3.0	Fabric care	12
	USF Storage notes and methods	12
	USF Cleaning and fabric care	12

Install questions?

**Contact us. We are here to
help you succeed!**

1.888.370.0202



BEFORE YOU BUILD


Proper Fabric Handling

To avoid smudges and dirt buildup on your fabric, always install your product using nitrile gloves. Even clean hands can leave an oily residue on the fabric surface that attracts dirt and dust. Additionally, consider using drop cloths or plastic sheeting on the floor to maintain a clean working environment free of debris.

Included in the Bag



Nitrile Gloves

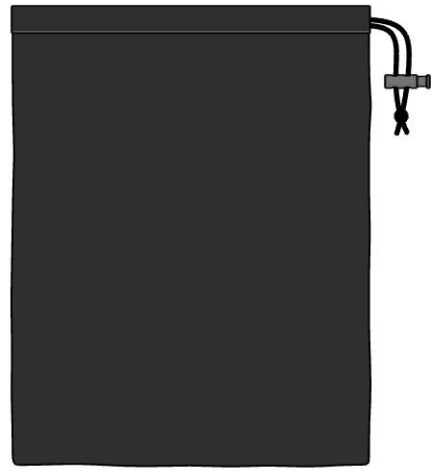

Storage Bag



Metal Gate Rings


Recommended Tools



Bungee



Cable Ties

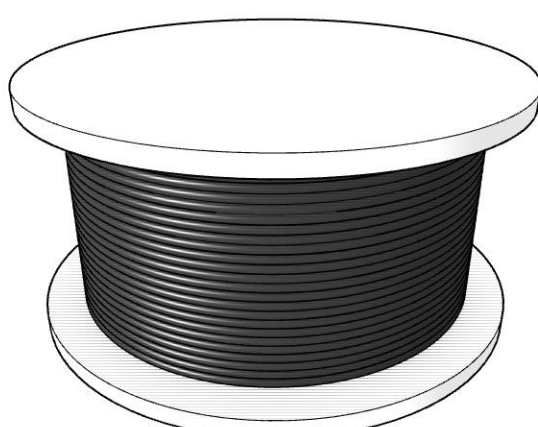


Tie Line

PRODUCT CONSTRUCTION

Assembling your panel wall

1


Unpack your panel wall tiles and identify each type of tile. Panel wall tiles come in the styles depicted below and on the following page. **Identify the marked corner on each of your panel wall tiles.**

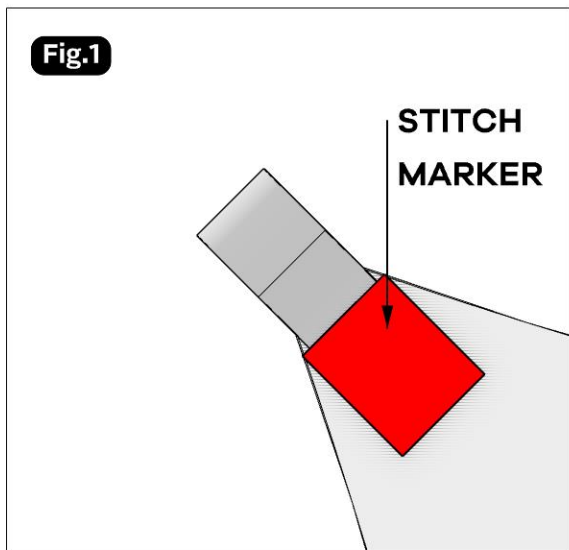


Each tile has one corner marked with **OFF-WHITE stitching**.

Diagrams herein will represent the corner marker with **RED** for clarity.


SQUARE PANEL

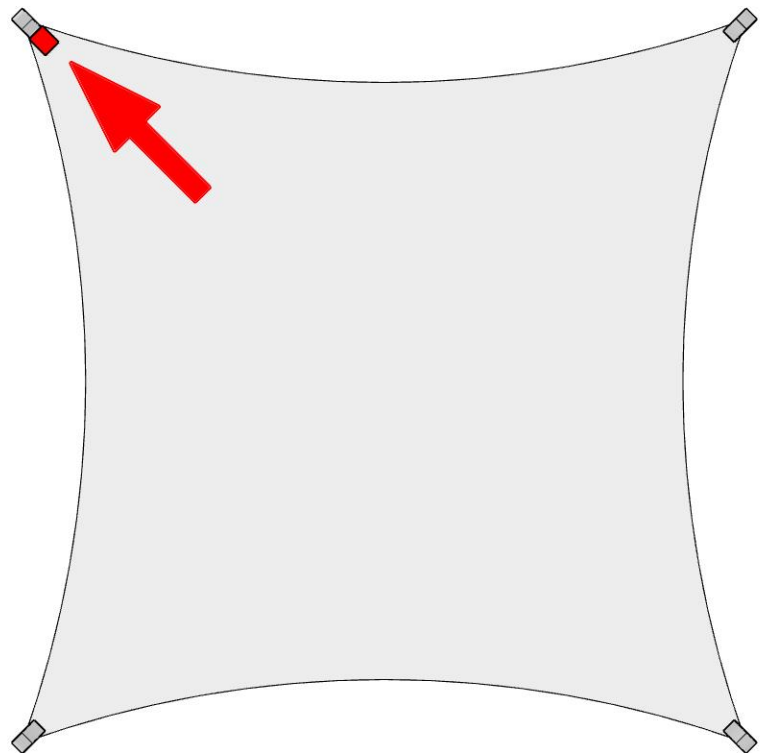


DIAMOND PANEL

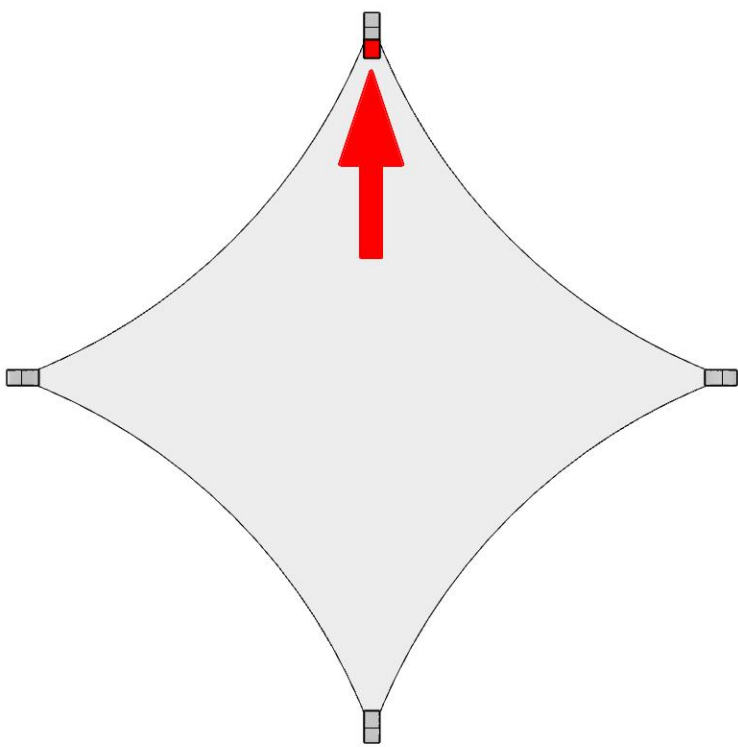


DIAMOND FILL PANEL 1

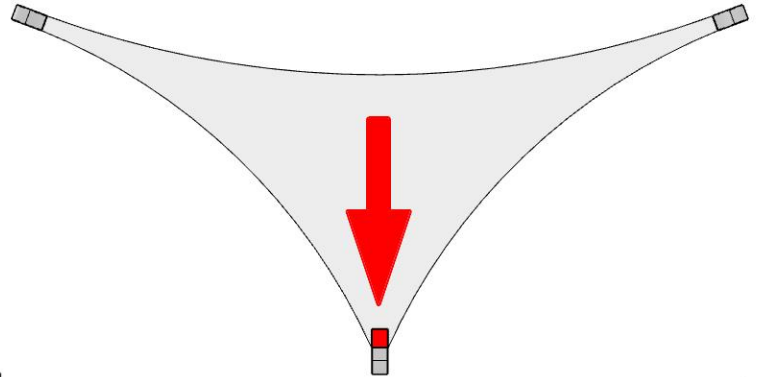


DIAMOND FILL PANEL 2

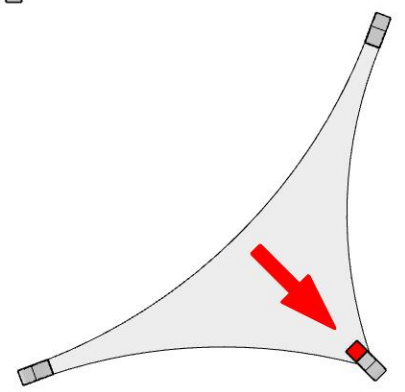

RECTANGLE PANEL

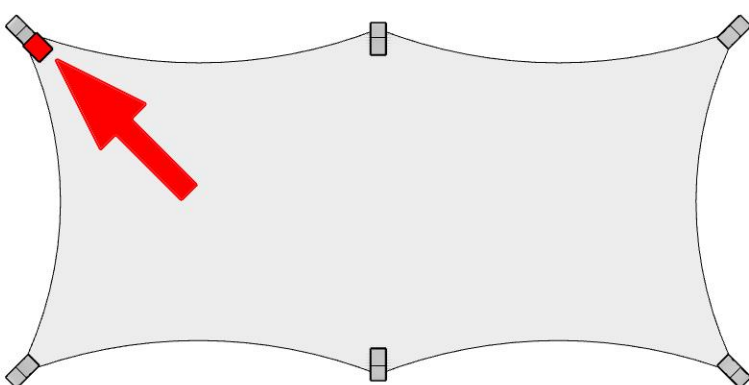


RECTANGLE FILL PANEL 1

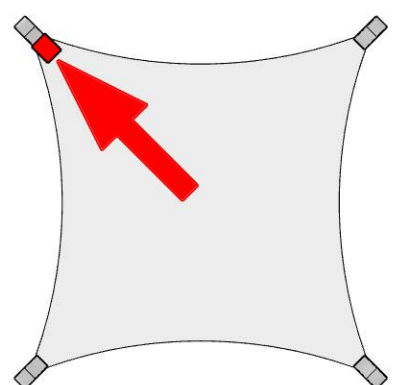


1 cont.

Unpack your panel wall tiles and identify each type of tile. Panel wall tiles come in the styles depicted below and on the following page.
Identify the marked corner of each on your panel wall tiles.


HEXAGON PANEL

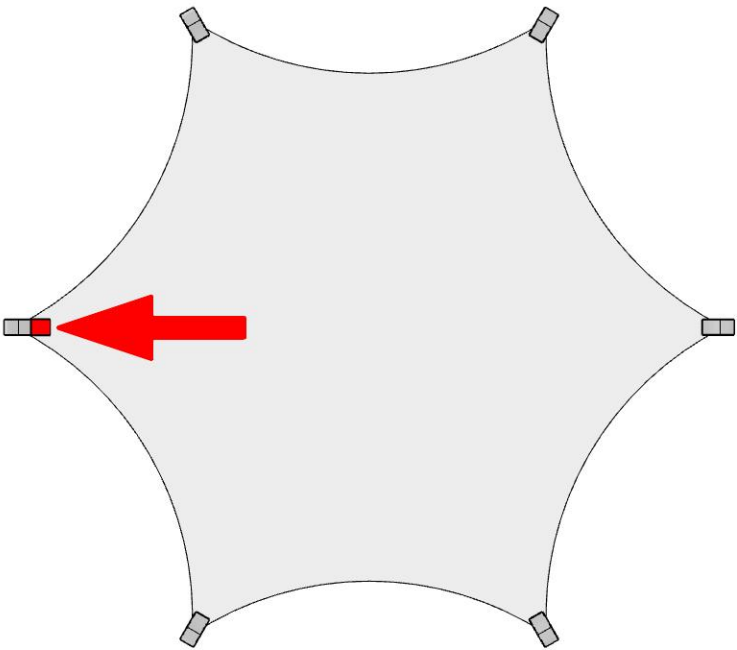


HEXAGON FILL PANEL 3

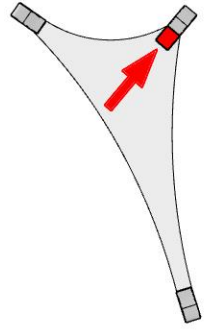


HEXAGON FILL PANEL 2

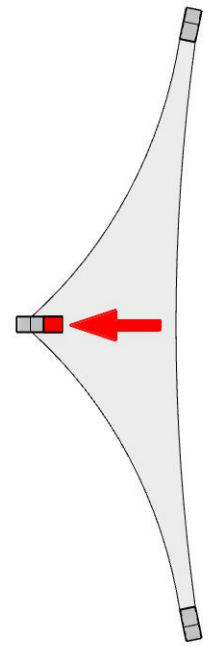



HEXAGON FILL PANEL 1

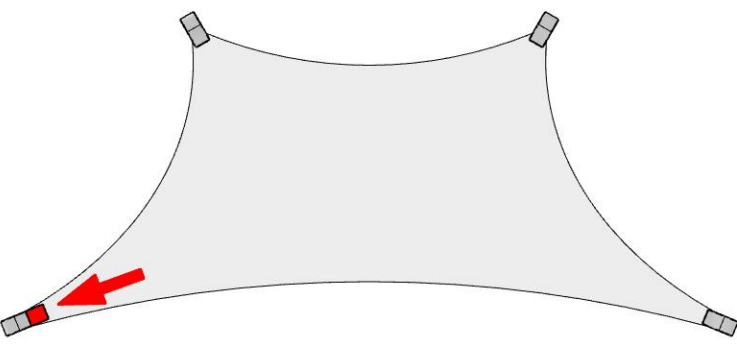

TRIANGLE PANEL

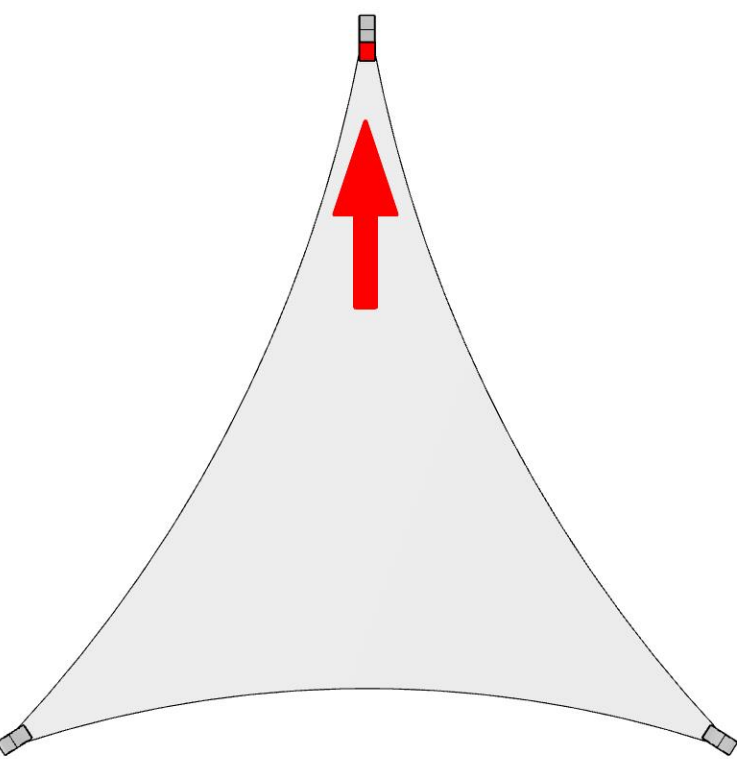

TRIANGLE FILL PANEL 1

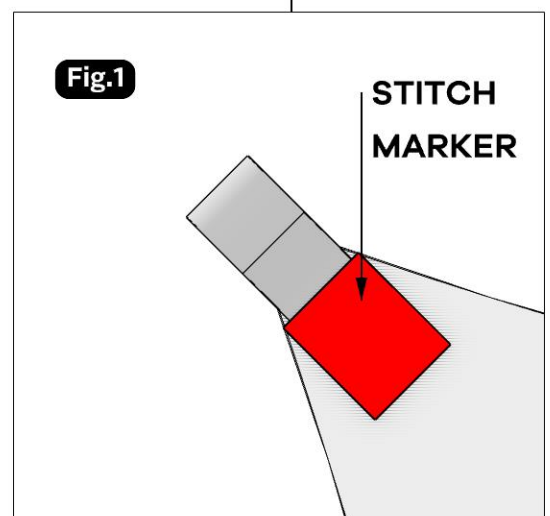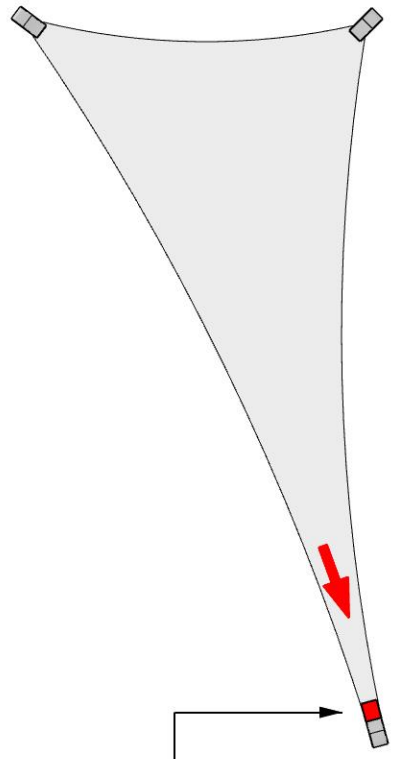


2

Lay out your tiles into your desired configuration. Use any of the patterns below as a guide for proper layout. **Make sure that the corner markers of each tile are oriented as depicted (red arrow).**


SQUARE PWT

Example layout

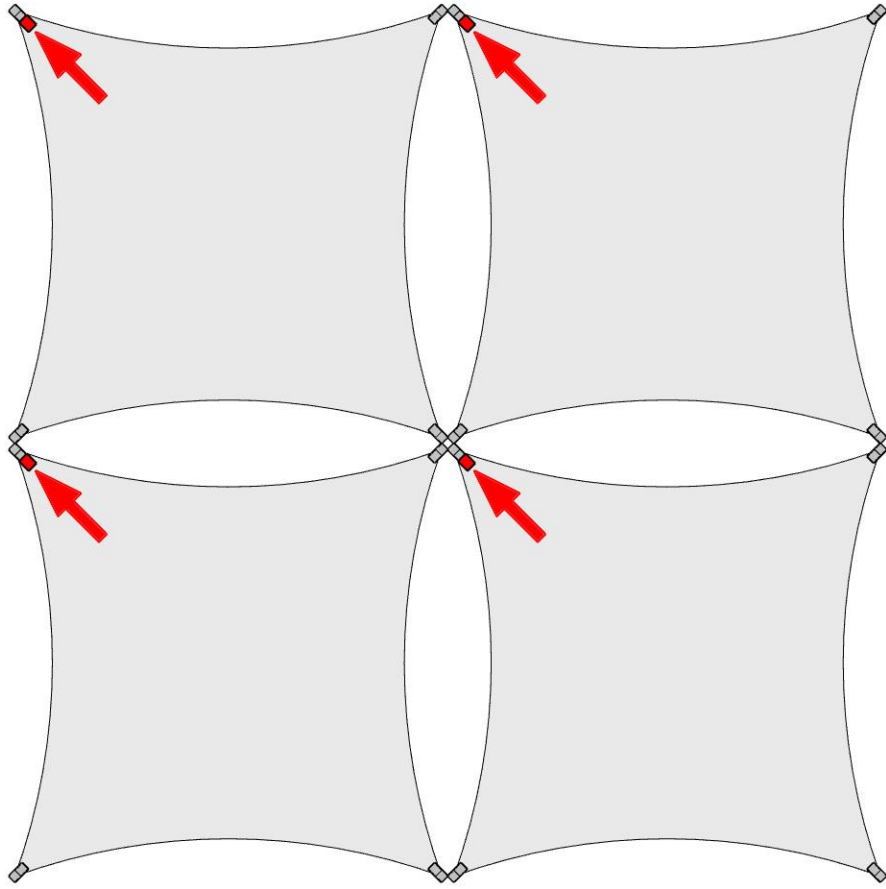


DIAMOND PWT

Example layout

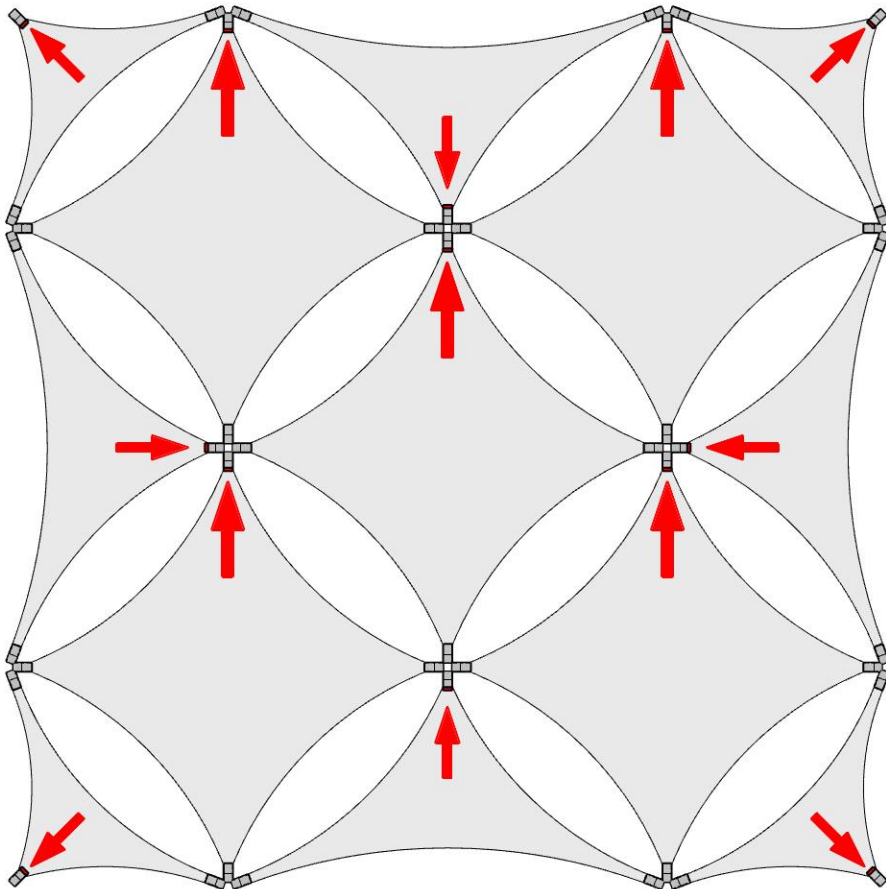

RECTANGLE PWT

Example layout

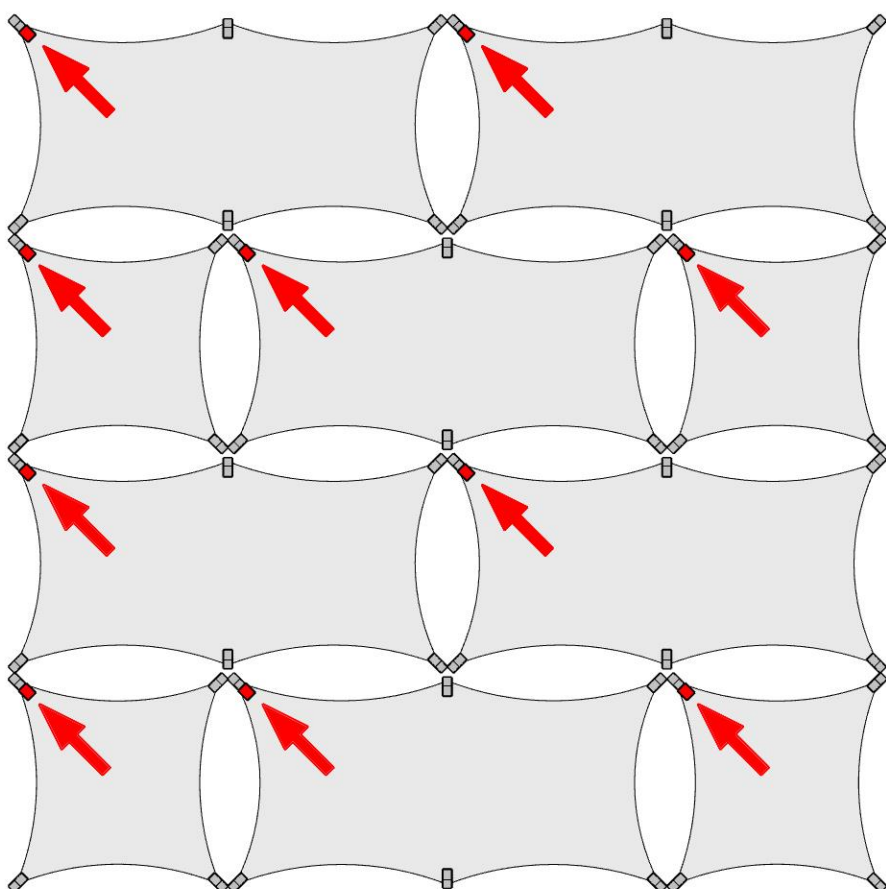


2 cont.

Lay out your tiles into your desired configuration. Use any of the patterns below as a guide for proper layout. **Make sure that the corner markers of each tile are oriented as depicted (red arrow).**


TRIANGLE PWT

Example layout

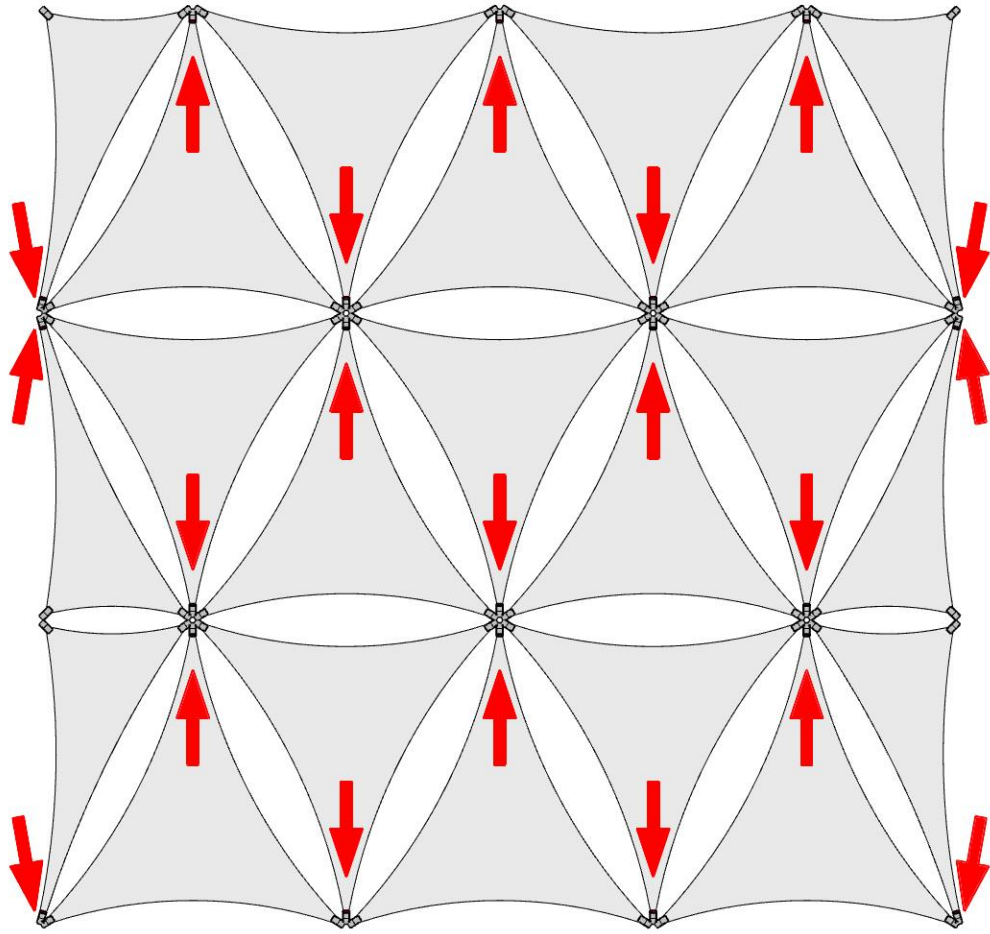

HEXAGON PWT

Example layout

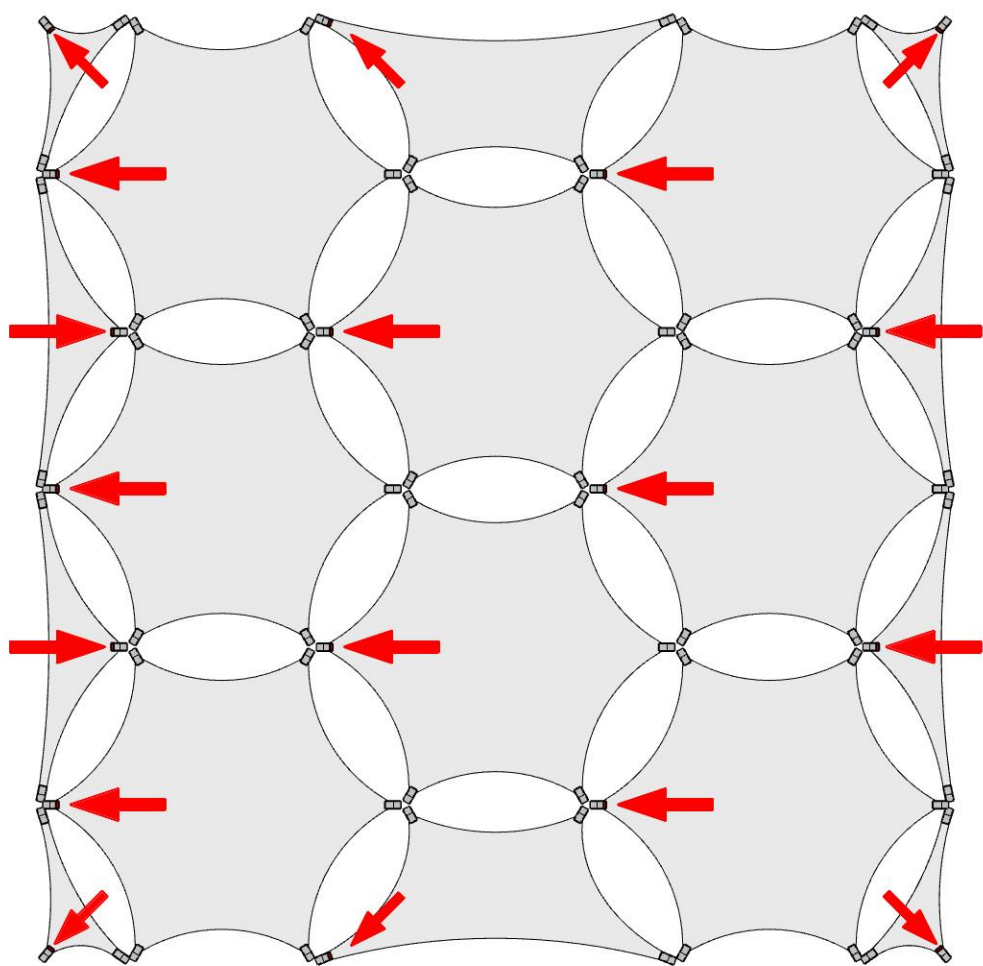

3

After laying out your panels in the correct orientation, connect them together using the included gate rings. Open the gate ring and thread it through the sewn-on fabric loops.

Fig.2


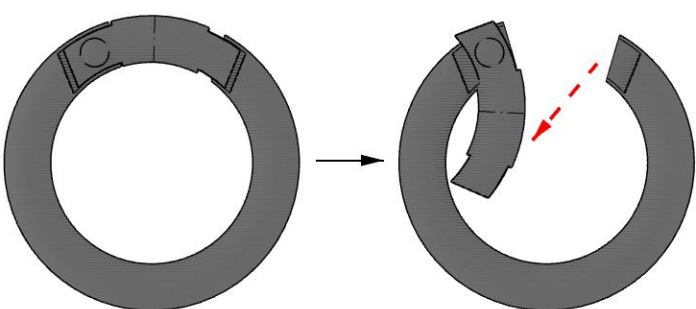


Fig.3



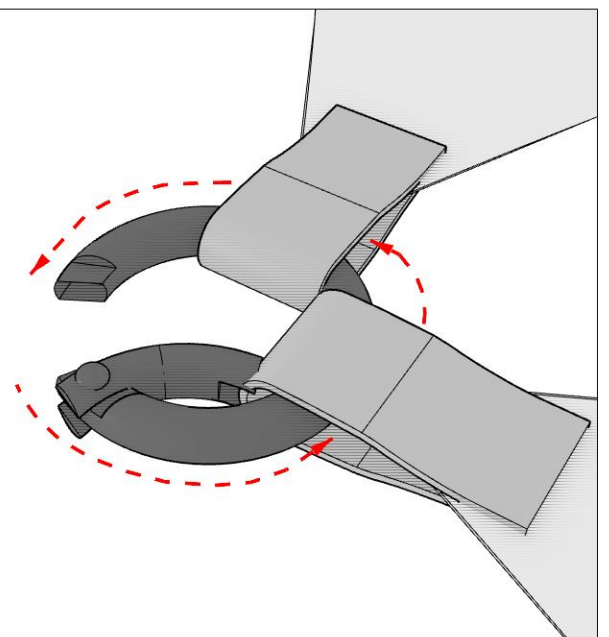


3 cont.

After laying out your panels in the correct orientation, connect them together using the included gate rings. Open the gate ring and thread it through the sewn-on fabric loops.

SQUARE PWT

Example layout - Gate rings connecting panel wall tiles together

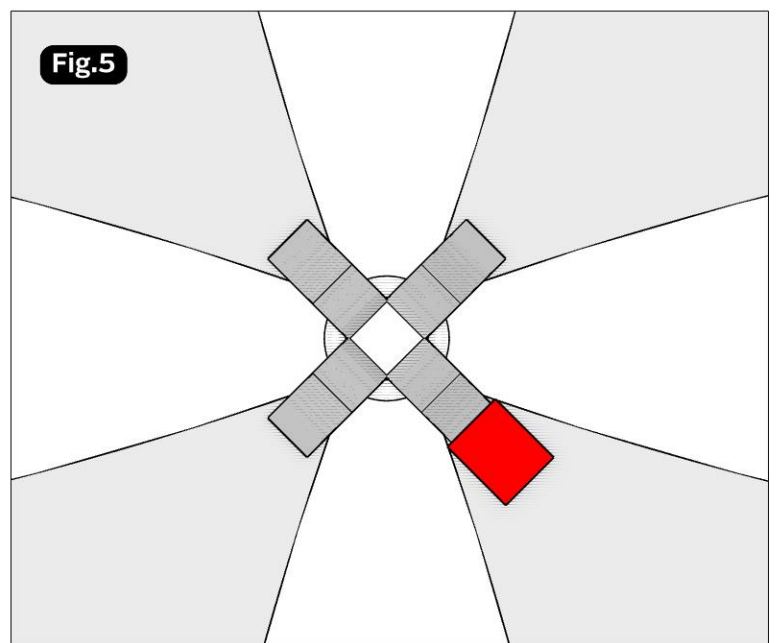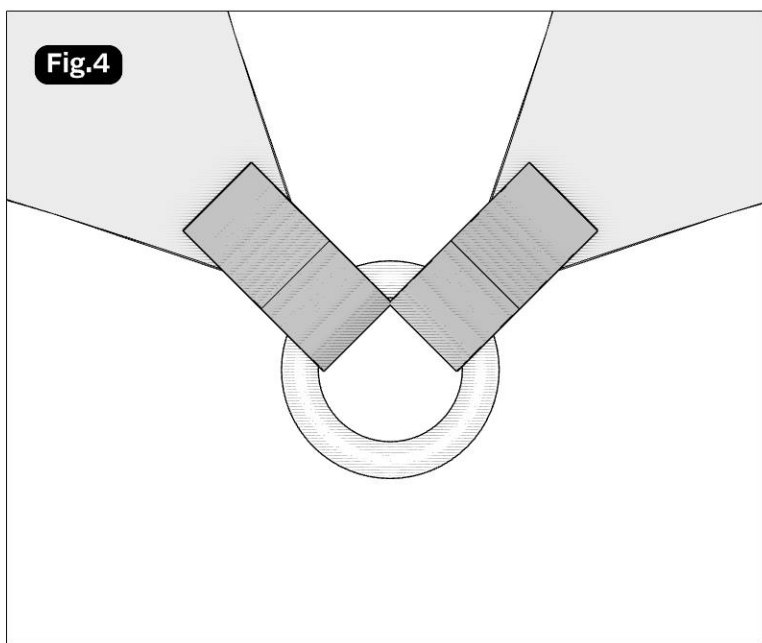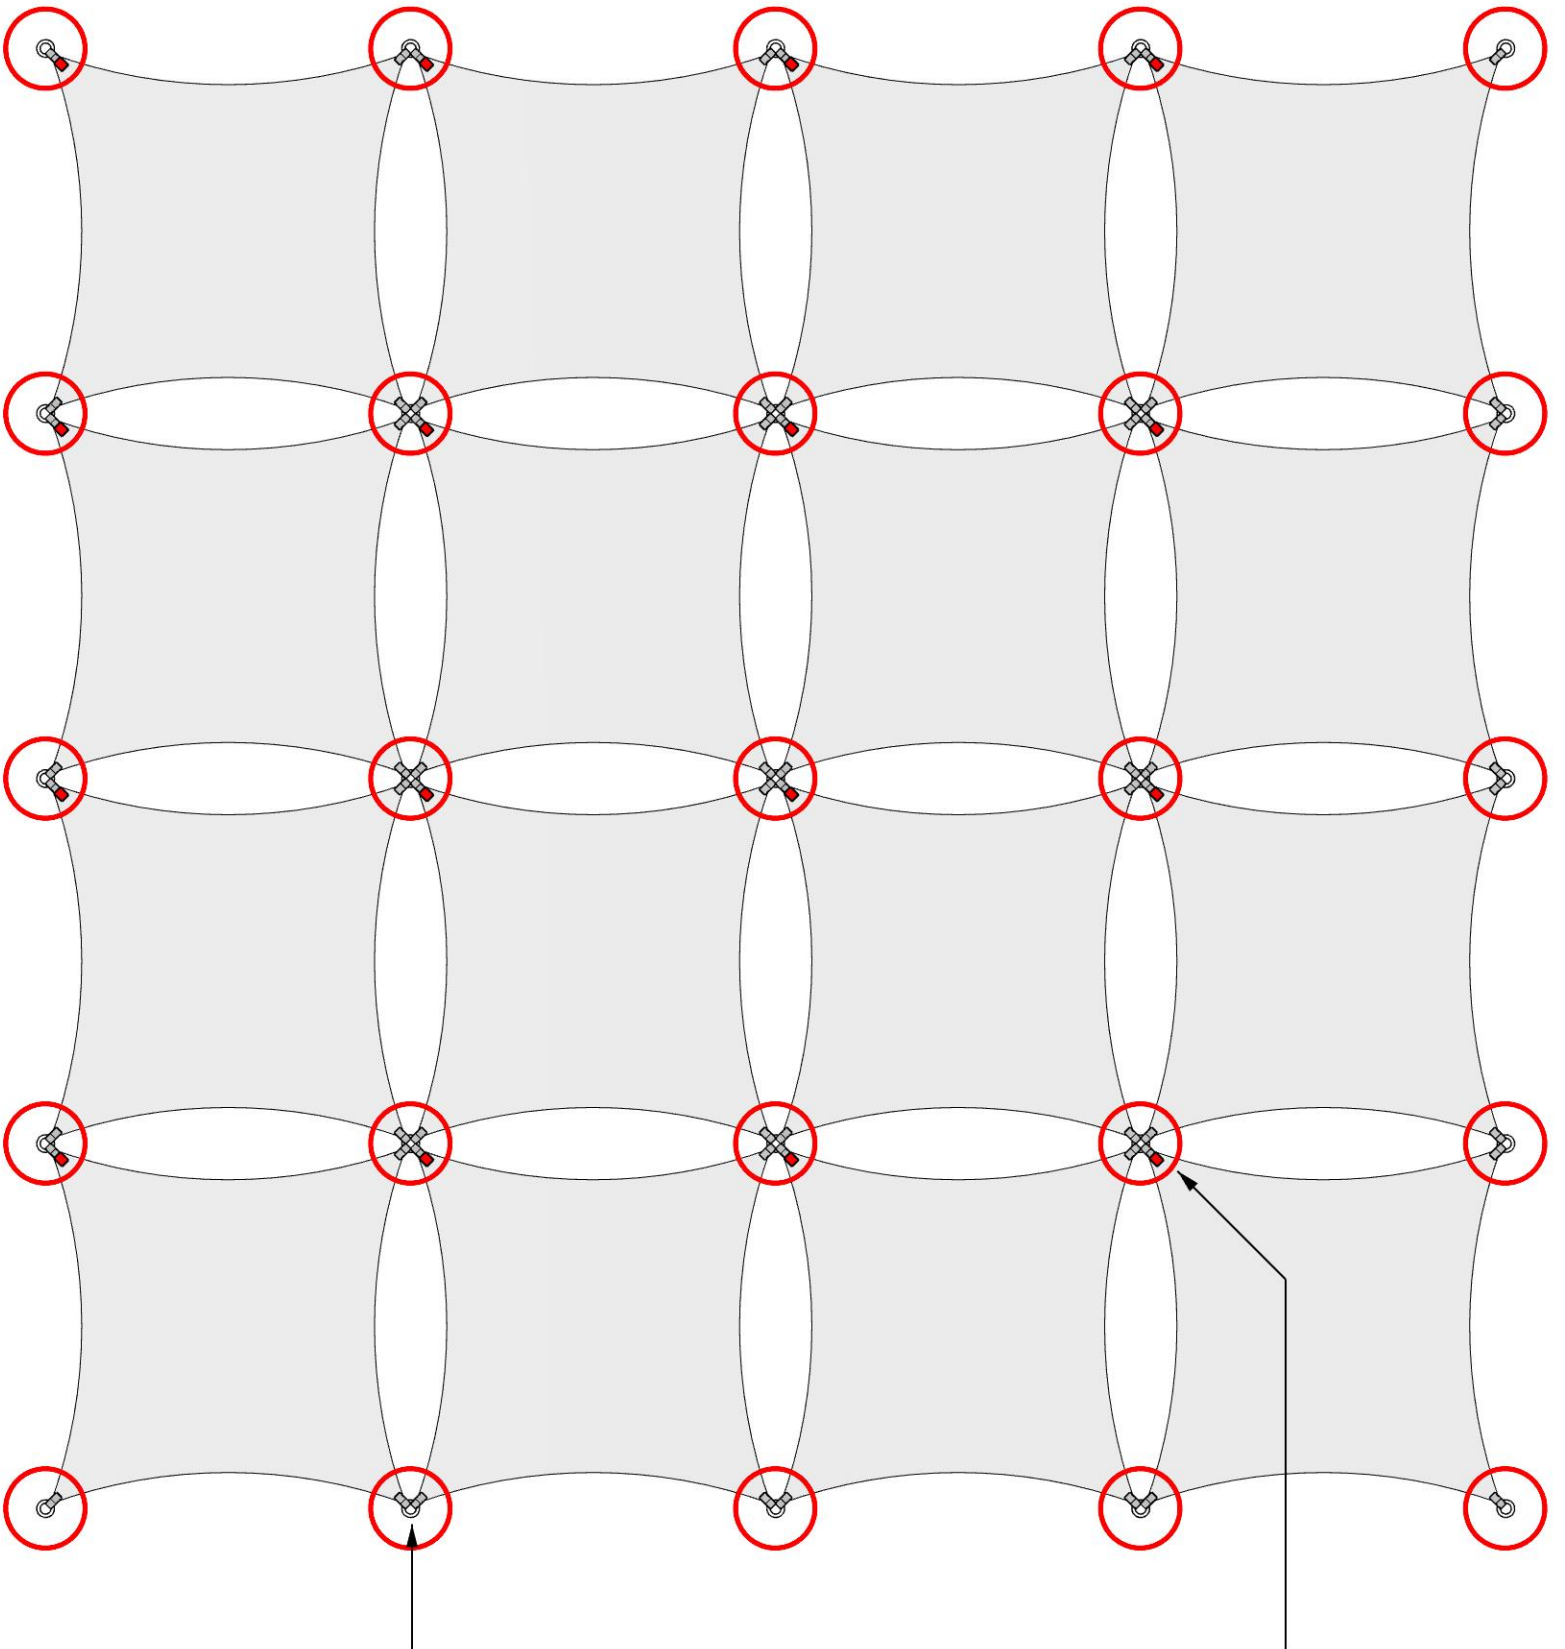

PRODUCT CONSTRUCTION


Mounting your assembled panel wall

1

Establish a clean working environment. Consider using drop cloths or plastic sheeting to maintain a debris-free surface. Put on your nitrile gloves.

2

Construct a frame, or utilize an existing structure to support the panel wall fabric system. An example is shown below.

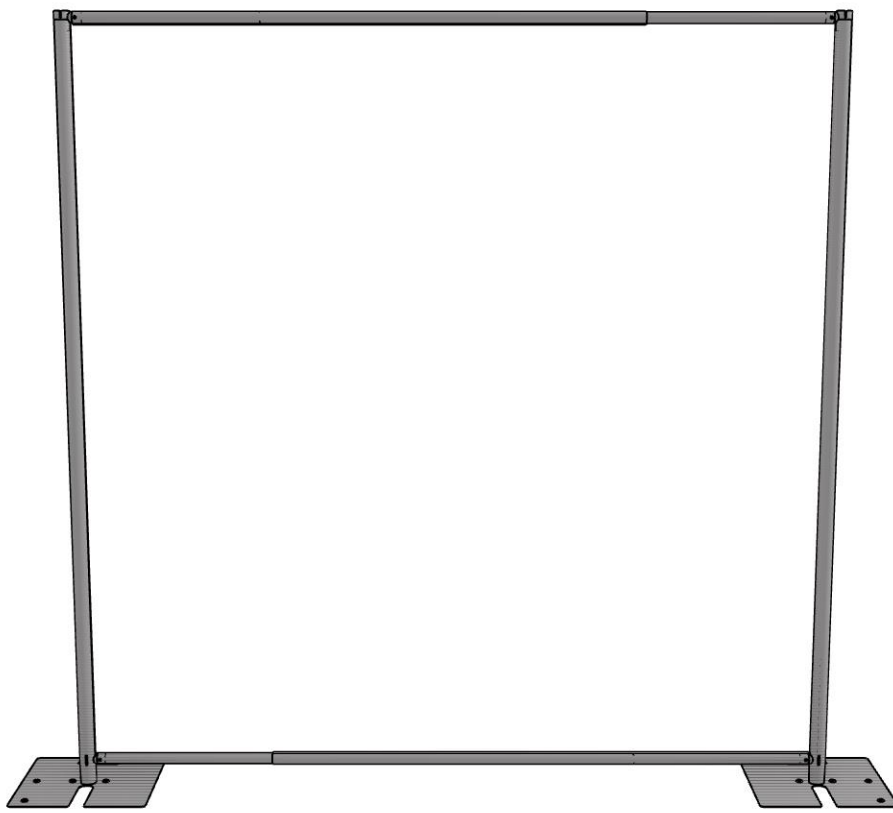

3


Determine what method you want to use to attach your panel wall fabric system onto the frame you have constructed. Recommendations for rigging through gate rings are shown below.




Bungee



Cable Ties

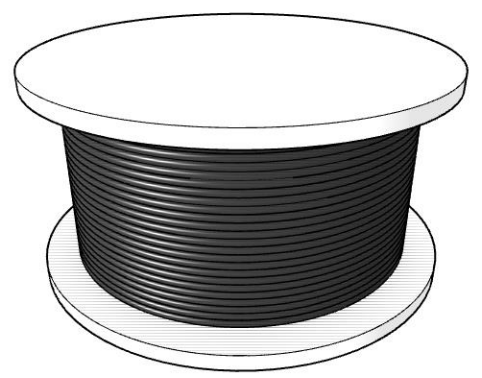


Tie Line

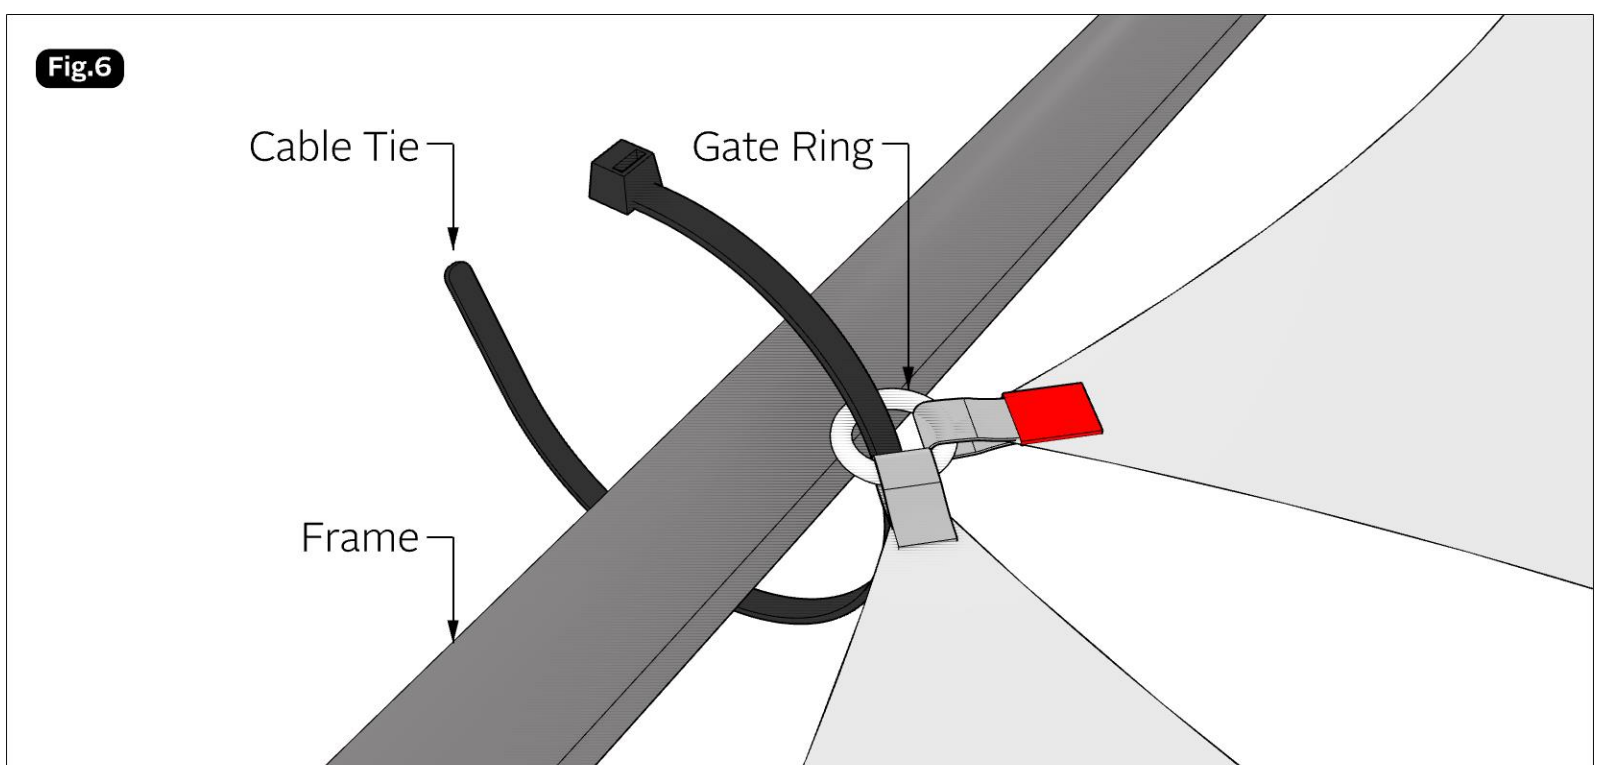

4


Attach your panel wall system into its finished position. Start by attaching corner points, followed by rigging points closest to the middle of each side. Finally, attach all other remaining points. An example is shown below.

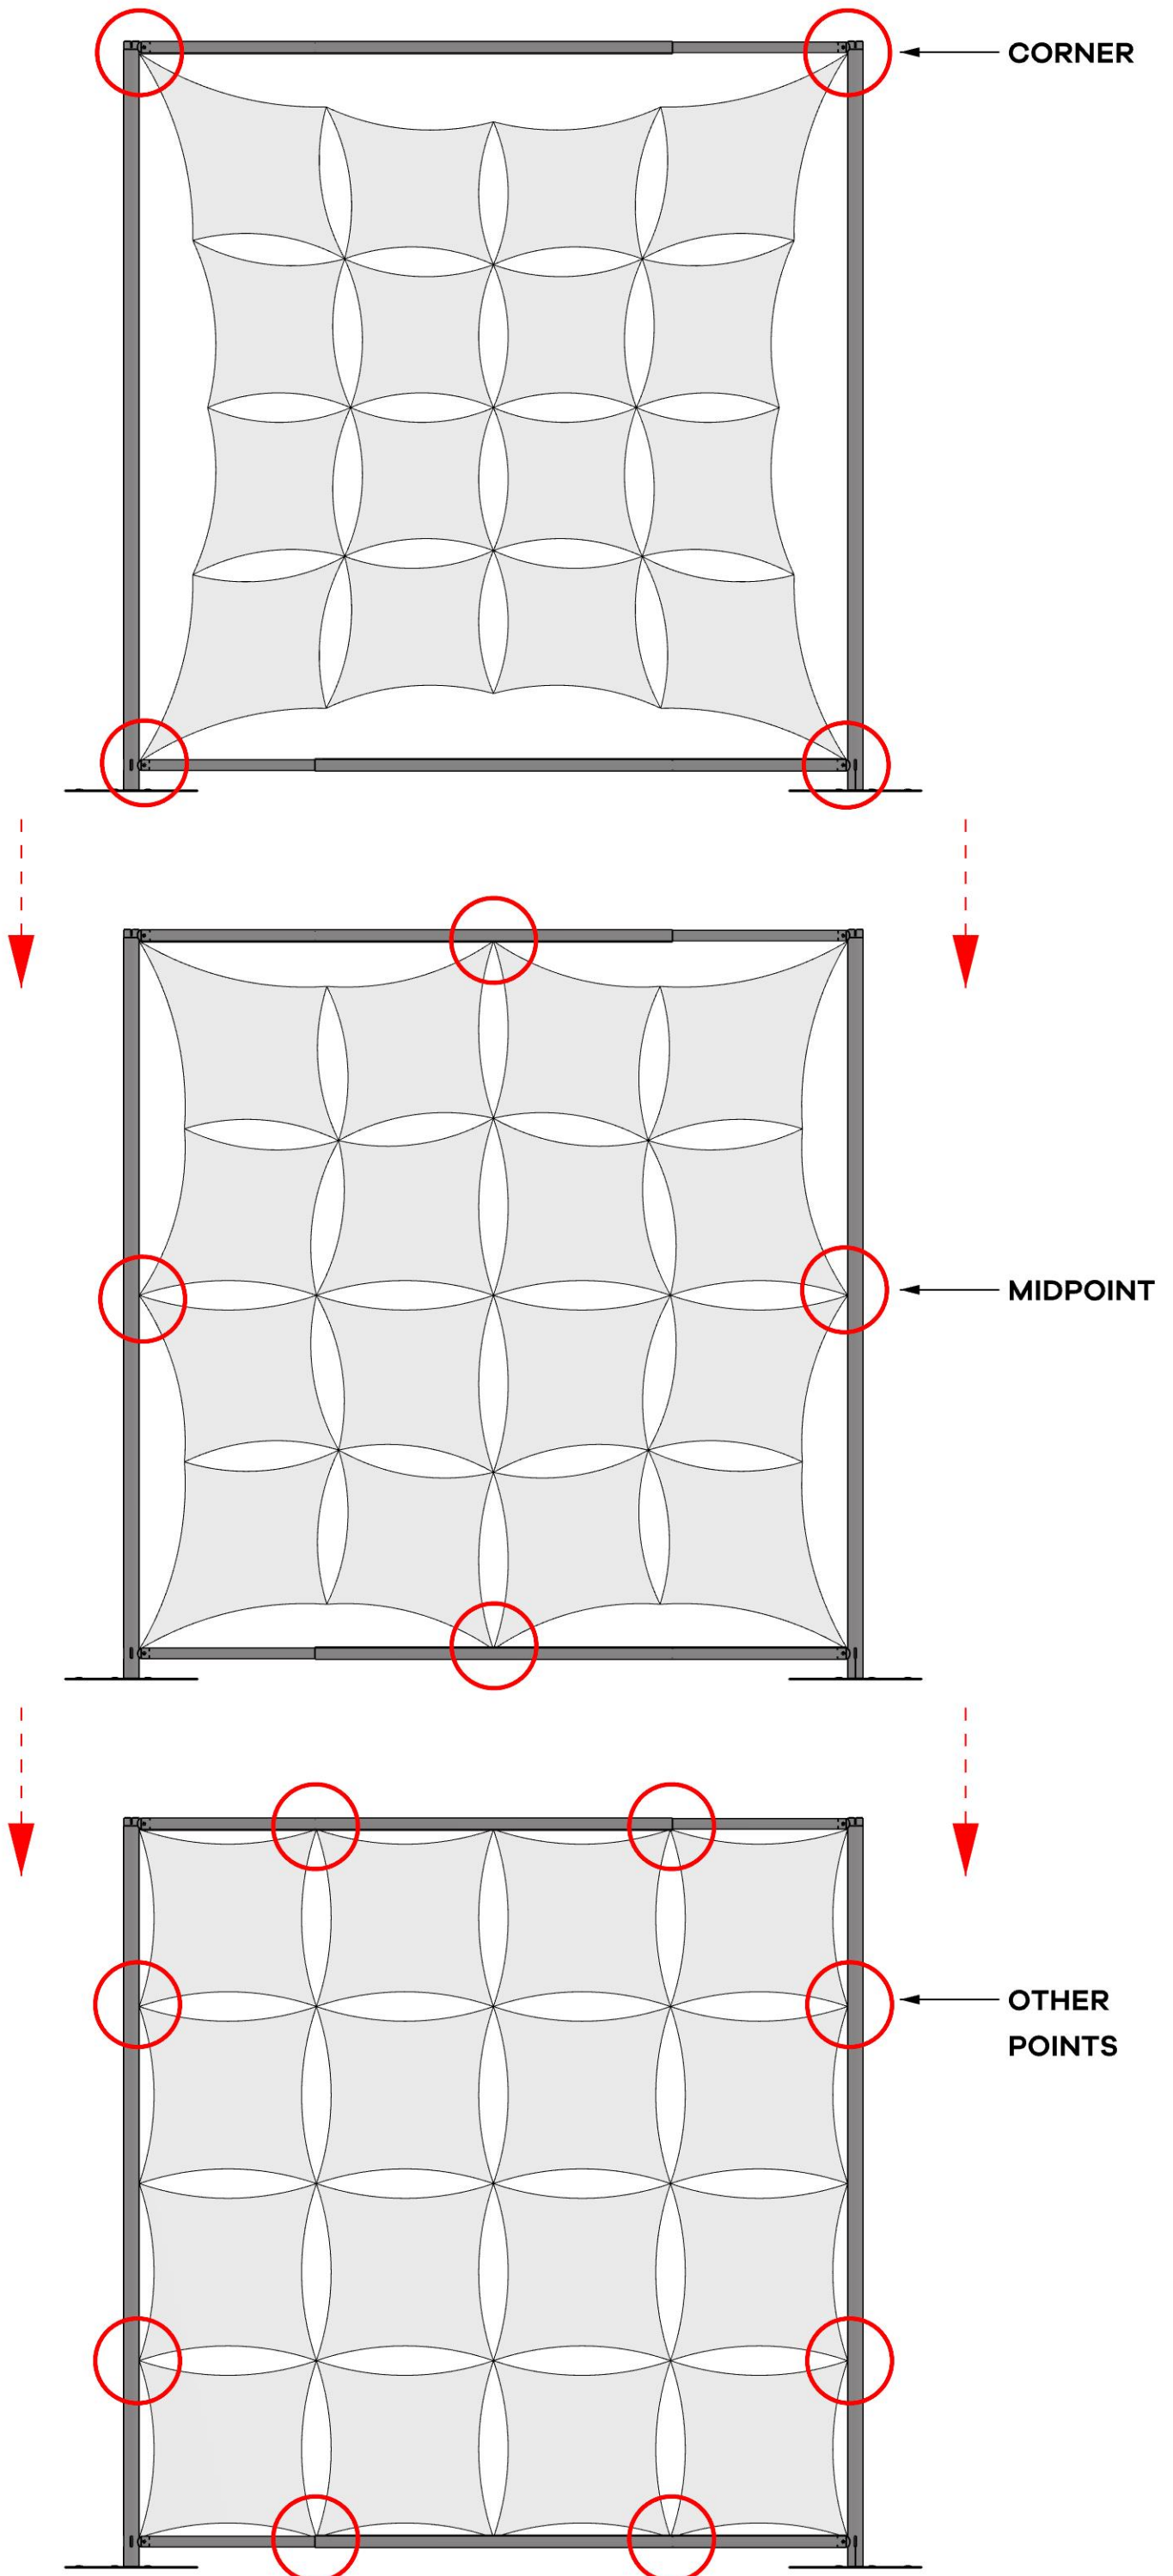

Completing 3D Panel Wall Tiles (Optional)


1

If you purchased 3D Panel Wall Tiles, complete the following steps to finish your panel wall. The example shown below is for square tiles.

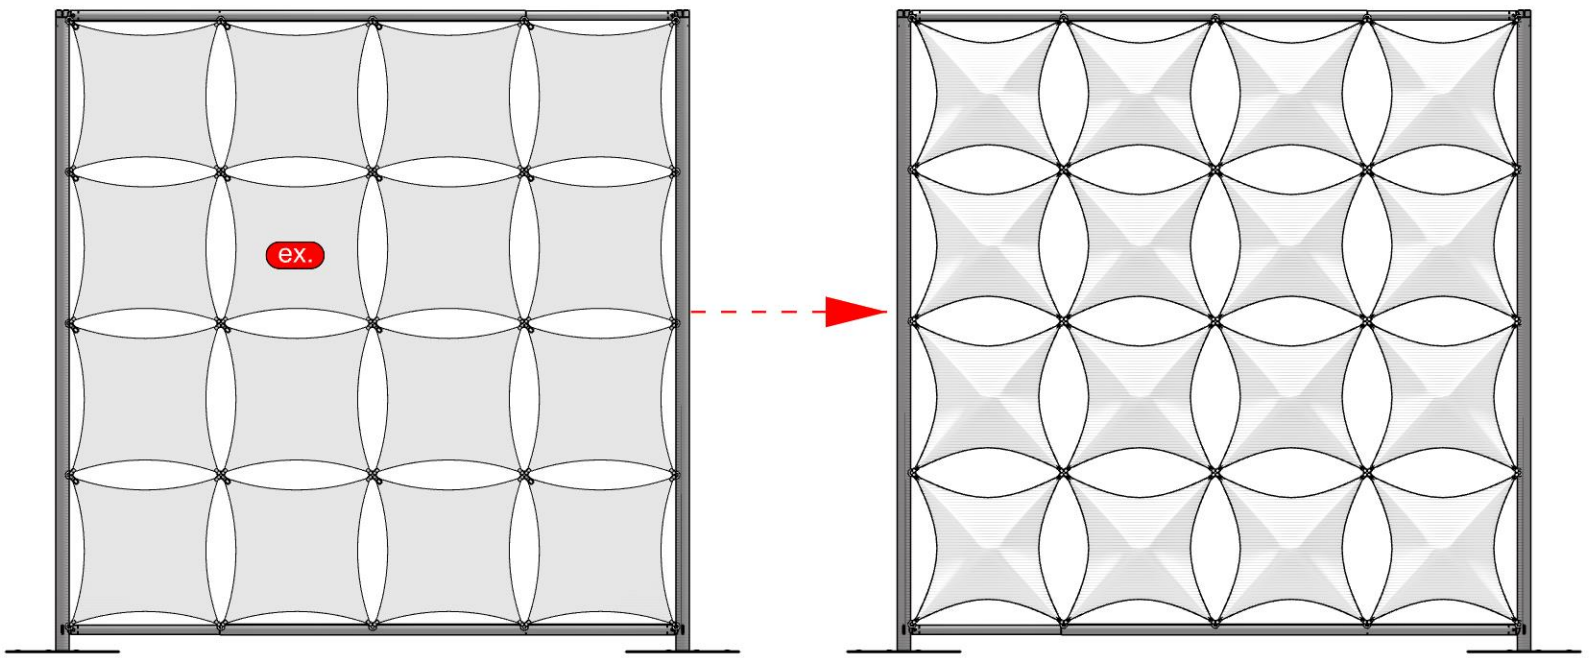


A

Identify the opening in the tile. It will be along one edge near the corner.

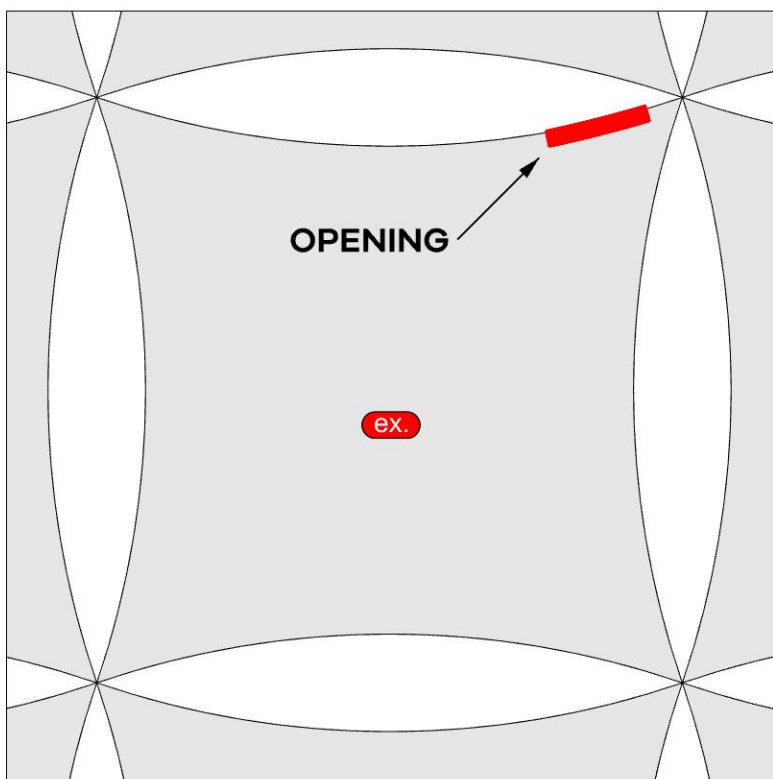


B

Insert the provided PVC tension rod into the panel.

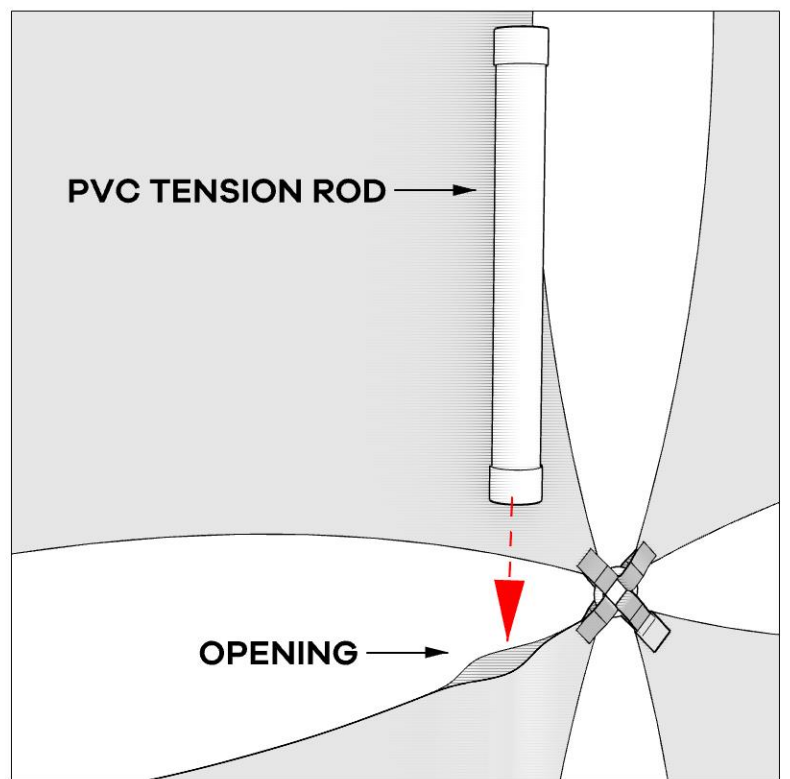


C

Stretch the fabric around the rod until it is in the center, front to back horizontally.

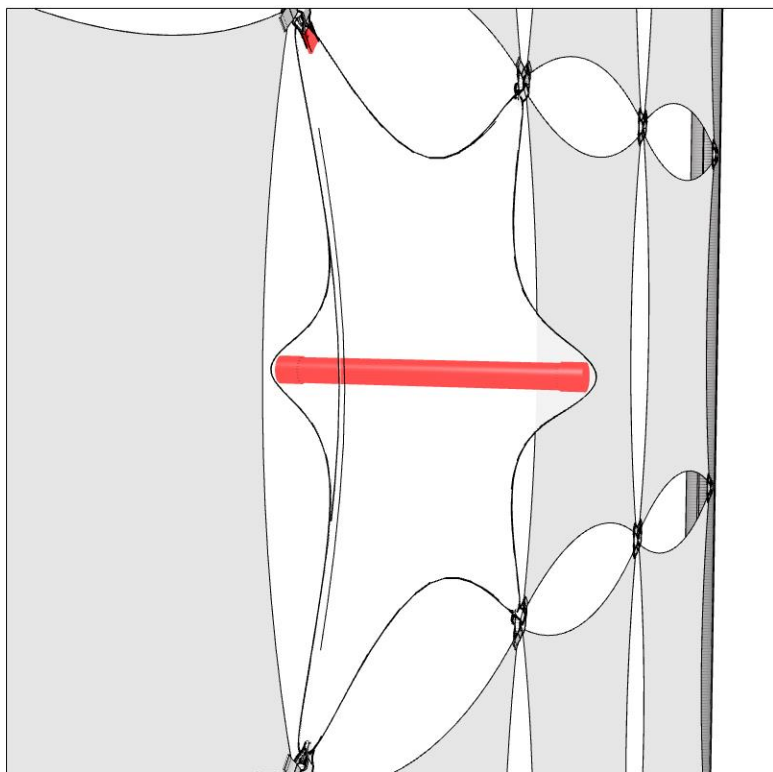

D

Repeat steps A-C for all remaining applicable tiles.

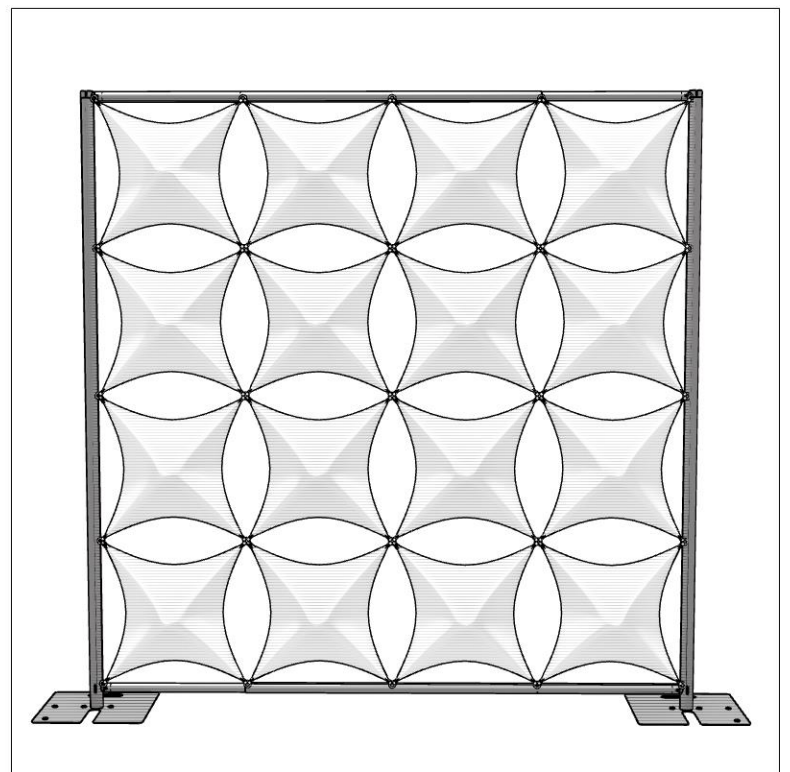

FABRIC CARE

UNIVERSAL STRETCH FABRIC (USF)

Storage Notes and Methods

Qualified orders include a cloth drawstring bag, which is ideal for long-term storage. When storing your fabric in a sealed container, like the plastic bag the skin arrived in, the fabric must be completely dry to avoid mold or mildew growth.

If your product includes any metal parts such as gate ring, rigging supplies, or frames, be sure to remove them prior to storage. Wrinkles can result from fabric storage. Almost all wrinkles from storage will stretch out once the fabric is installed correctly. If deep wrinkles persists, place fabric in a dryer on low heat for a few minutes.

Cleaning and Dusting

Light clean: Fingerprints from installation without gloves are the main culprit of a dirty screen. Follow the setup instructions carefully, and always use nitrile gloves when handling fabric skins. To remove light stains, use hot soapy water and dab the area clean.

Deep clean: Machine wash fabric on delicate with detergent and Oxiclean®. Machine dry on low heat, regularly checking for completion. IFR products dry quickly. All USF products will retain IFR (Inherently Flame Retardant) certification after repeated washes.

Dusting: We understand that many of our products may be left up over long periods of time. Dust will inevitably stick to the surface and collect. To remove dust on fabric, use a clean object to lightly bat the back surface. Start at the center of the fabric and move towards the outer edges.



DO NOT OVER DRY. Extended heat will damage the spandex in the fabric material.




DO NOT USE BLEACH or bleach-based cleaners on USF fabric. Bleach will damage the spandex in the fabric.



MOSS

WE ARE PLACE MAKERS™

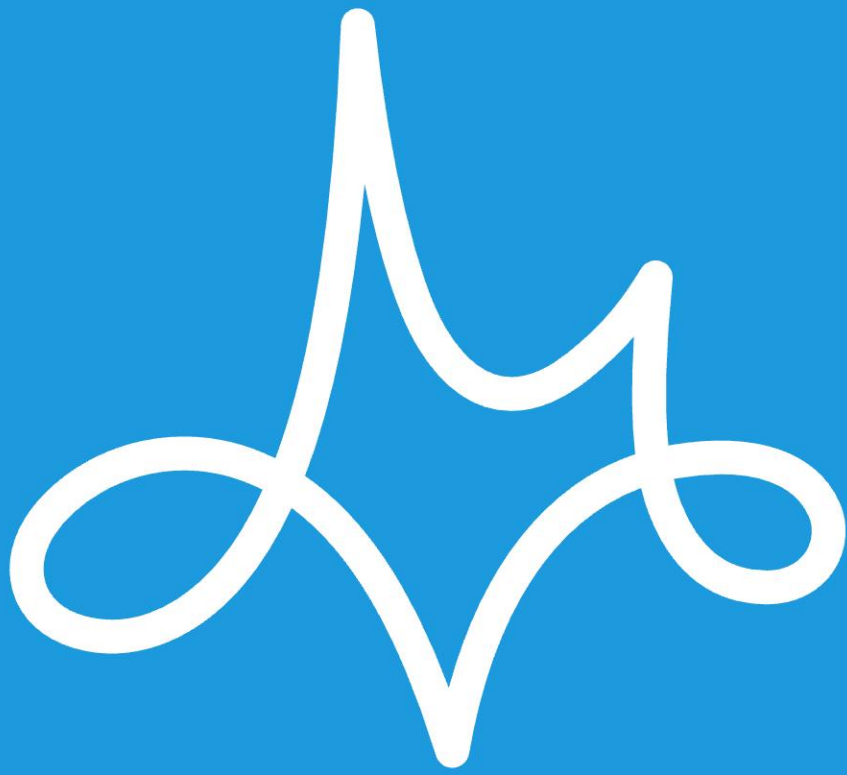

MOSS

WE ARE PLACE MAKERS™